



FFC01 Band Pass filter


- Up to 150W, dual cavity RF Filter for FM Radio Stations, 87.5 -108MHz
- Can also be used to improve FM reception in high RF environments
- Optional 4RU rack mounting kit available
- Low loss, very rugged, stable tuning over time, compact design
- Conservatively rated, high quality materials & precision crafted parts
- Designed to minimize inter-mods, harmonics or spurious emissions

Typical Specifications

Model	FFC01
Max Power	150W
Impedance	50 Ohm
Frequency Range	87.5-108MHz
Insertion Loss	-0.60dB to -1.25dBMax
Return Loss +/- 150kHz	≤-26dB
Rejection +/- 3.5MHz	Typical ≤-30dB
Connectors	N-Type Female Input/Output
Working Temperature	-4°F to 122°F
Weight	6kg/14lbs
Dimensions	400 mm / 16" inches (H)
	190 mm / 7 1/2" inches (L)
	90 mm / 3 1/2" inches (W)



All features & specifications are subject to change without notice

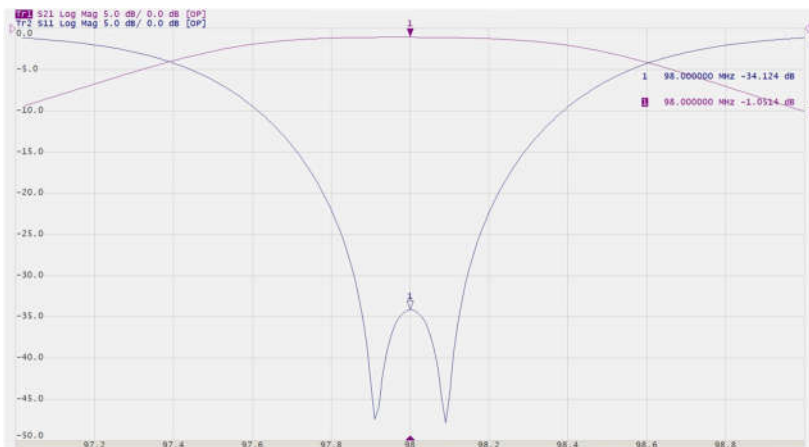

Optional 4 RU rack mounting kit