

# ez-Pro VS4

FULL HD SWITCHER  
**Switcher for everyone**

*ez-Pro VS4 is a 4 channels video source switcher. Video sources can enter through HDMI and/or SDI ports and can be assigned to HD displays and projectors. Built-in scalars on each input can adjust output video resolutions even though input sources have different resolutions. ez-Pro VS4 is born for church worship, educational activities, wedding, ceremonies, theater, and live concert.*

## Powerful Graphics and Effects




ez-Pro VS4 allows you to easily control Logo insertion, Chroma/Luma, Screen transitions and PIP.

## 2 x Logo Insertion




Still Images can be instantly loaded and displayed when needed.

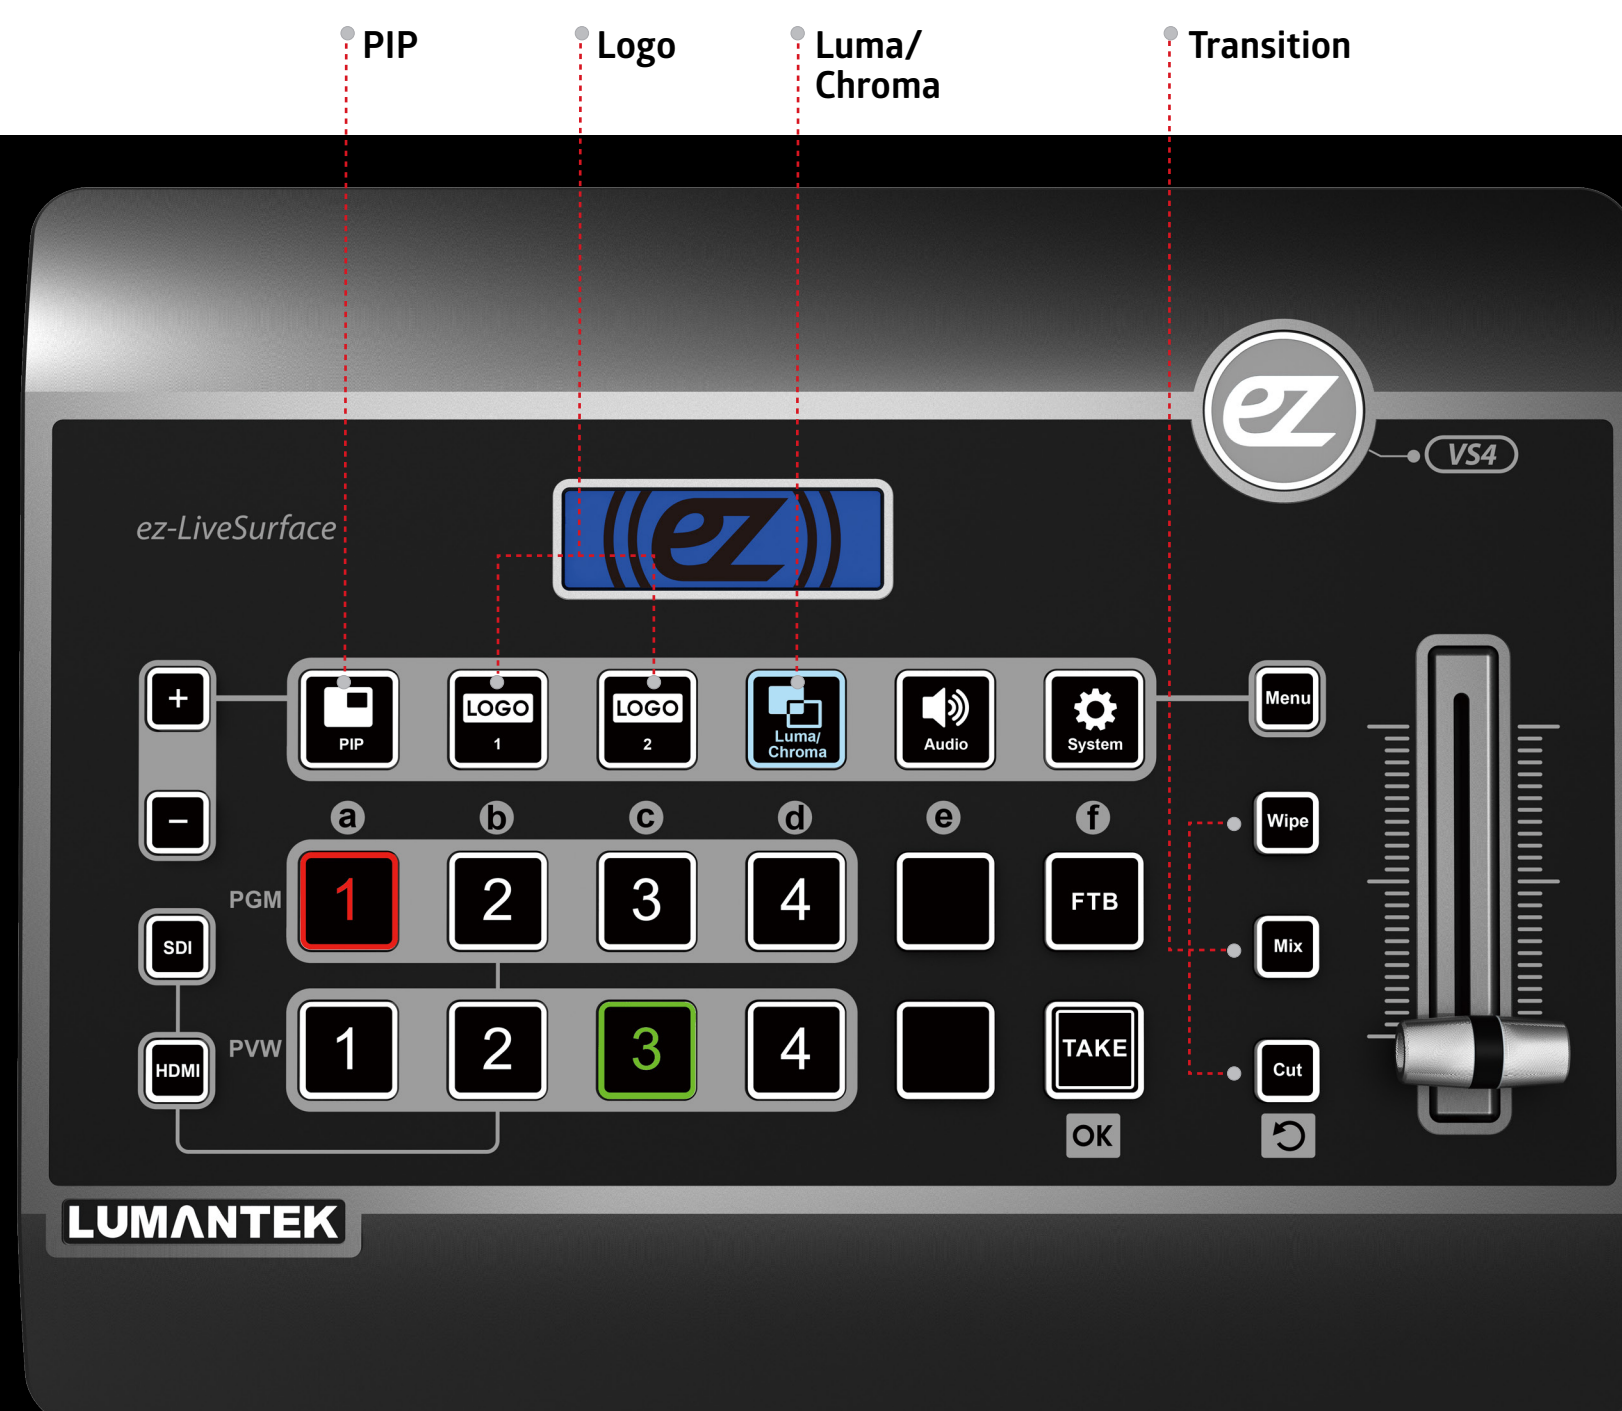

## 3G-SDI and HDMI Interface

ez-Pro VS4 inputs can be used in combinations of [2 x 3G-SDI & 2 x HDMI] or [1 x 3G-SDI & 3 x HDMI] plus stereo audio. Its outputs are 1 x 3G-SDI and 1 x HDMI. ez-Pro VS4's versatile combination of multi format switcher with scaler supports up to full HD.


## Internal Scalers for SD, HD, Full-HD

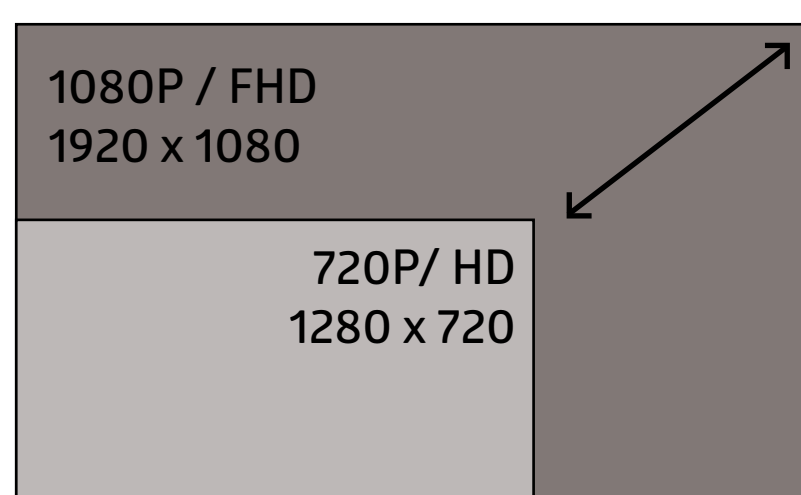

Each video input has a built-in scaler that can be set up to 1080p. The incoming video source resolution will be automatically displayed on the LED screen. The output program (PGM) can be up/down scaled to any HD resolution up to 1080p.

[gs@lumantek.com](mailto:gs@lumantek.com)  
[www.lumantek.com](http://www.lumantek.com)

Global Marketing & Sales Div. Lumantek, SEOUL

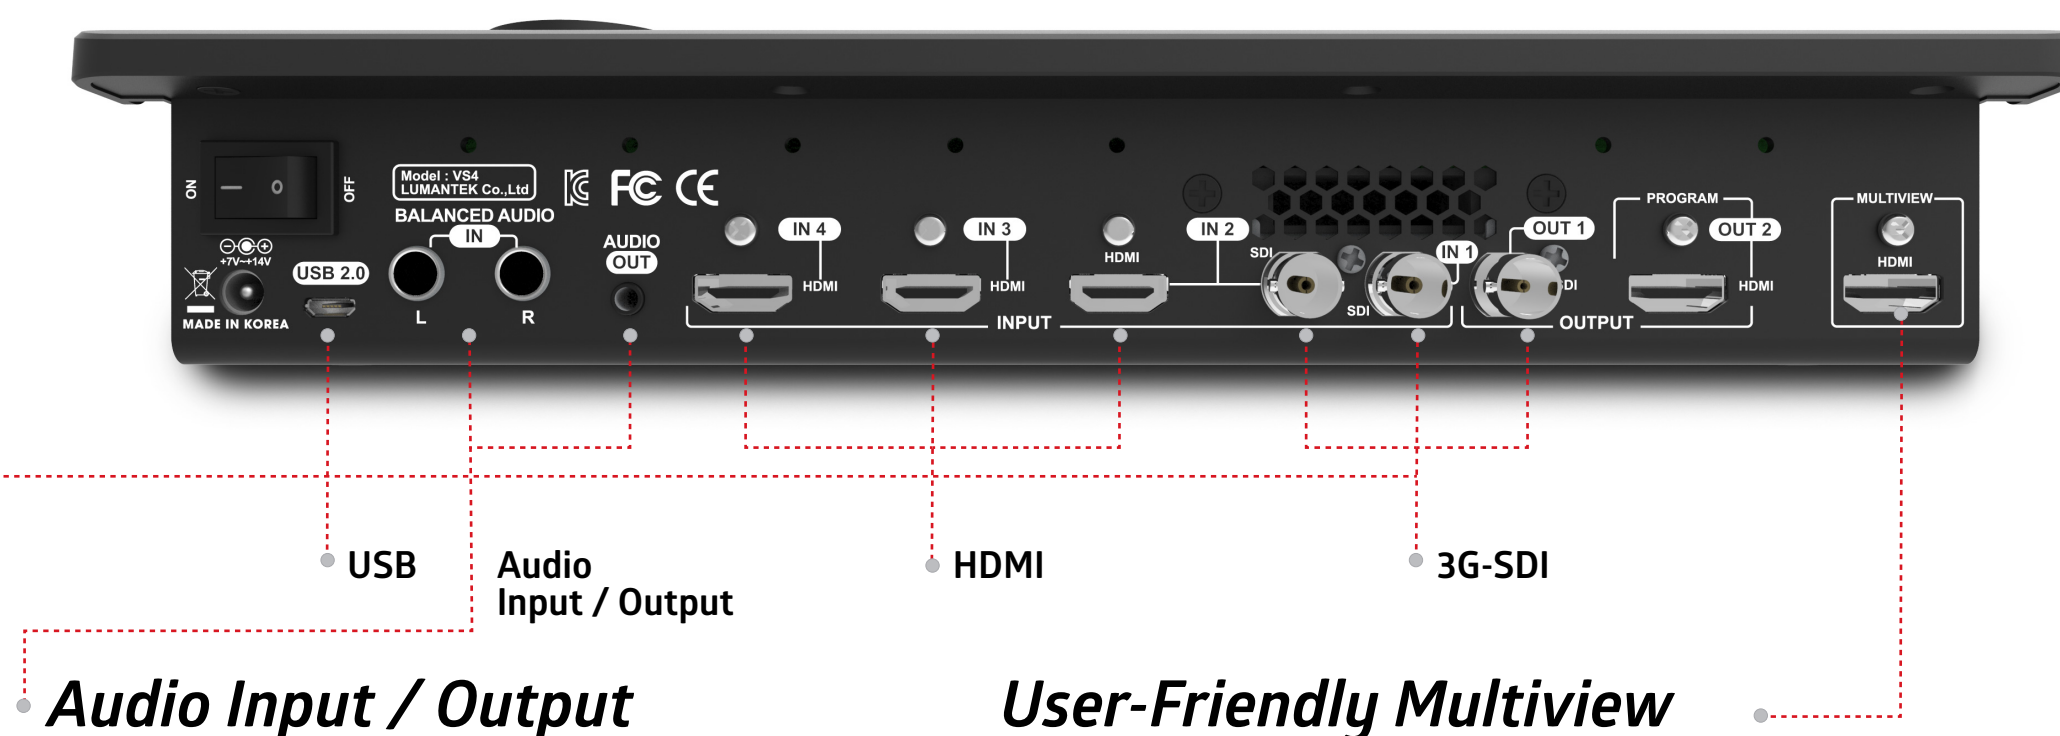

## Audio Input / Output



Stereo Balanced Audio input can be mixed with audio sources from 3G-SDI and HDMI video. Audio embedding and de-embedding supported.

## User-Friendly Multiview



You can monitor all sources at the same time on a screen through ez-Pro VS4. The multiview allows easy monitoring of all video inputs, audio levels, the preview (PVW) and the program (PGM) screen without confusion. Picture-in-Picture (PIP) can also be repositioned and resized on the multiview screen.

**LUMANTEK**



ez-Pro

# VS4

F U L L   H D   S W I T C H E R

Switcher for everyone

## System Specification

### 4x1 Video Switcher with Scaler

#### Input

Video Input : SDI(BNC 75Ω) x2, HDMI x3  
Analog Audio Input : 6.35mm(1/4") Phone Jack(Balanced) x 2  
±10V (Max) @ -10dB

#### Output

Video Output(PGM) HDMI x1, SDI(BNC 75Ω)x1  
Multiview Output : HDMI x1  
Analog Audio Output : 3.5mm Stereo Jack x 1  
Key  
- PIP x 1  
- LOGO x 2  
- CHROMA/LUMA x 1

Internal Processing : 4:2:2 10bits/8bits

#### Resolution supported

##### Input

- SD : 480i59/ 576i50/  
- HD : 1080p30/1080p29/1080p25/1080p24/1080p23/  
1080i60/1080i59/1080i50/720p60/720p59/720p50  
- Full HD : 1080p60/1080p59/1080p50

##### Output

- HD : 1080p30/1080p29/1080p25/1080p24/1080p23/  
1080i60/1080i59/1080i50/720p60/720p59/720p50  
- Full HD : 1080p60/1080p59/1080p50

#### Management

Console  
USB2.0 @ GUI application, Firmware Upgrade, LOGO Update

#### Physical

Dimension : 70(H) X 297(W) X 230(D)(mm, excluding connectors)  
Power Input : DC 7 - 14V  
Operation Temperature : 0 - 40℃  
Power Consumption : 20W(max)  
Weight : 1.7Kg