

# ATEM Mini Extreme



ATEM Mini Extreme is an advanced switcher for true professionals! You get all the ATEM Mini Pro features plus 8 HDMI inputs, 2 separate HDMI outputs, 2 USB ports and a headphone connection. There are also 4 chroma keyers, 6 picture in picture DVEs, 2 media players, and a multiview with up to 16 views!

**\$995**

## Connections

**Total Video Inputs**

8

**Total Outputs**

4

**Total Aux Outputs**

2

**Total Audio Inputs**

2 x 3.5mm stereo mini jack.

**Total Audio Outputs**

1 x 3.5mm stereo mini jack.

**Timecode Connection**

None

**HDMI Video Inputs**

8 x HDMI type A, 10-bit HD switchable.  
2 channel embedded audio.

**Video Input Re-Sync**

On all 8 HDMI inputs.

**Frame Rate and Format Converters**

On all 8 HDMI inputs.

**HDMI Program Outputs**


2

**Ethernet**

Ethernet supports 10/100/1000 BaseT for live streaming, software control, software updates and direct or network panel connection.

**Computer Interface**

2 x USB Type-C 3.1 Gen 1 for external drive recording, webcam out, software control, software updates and panel connection.

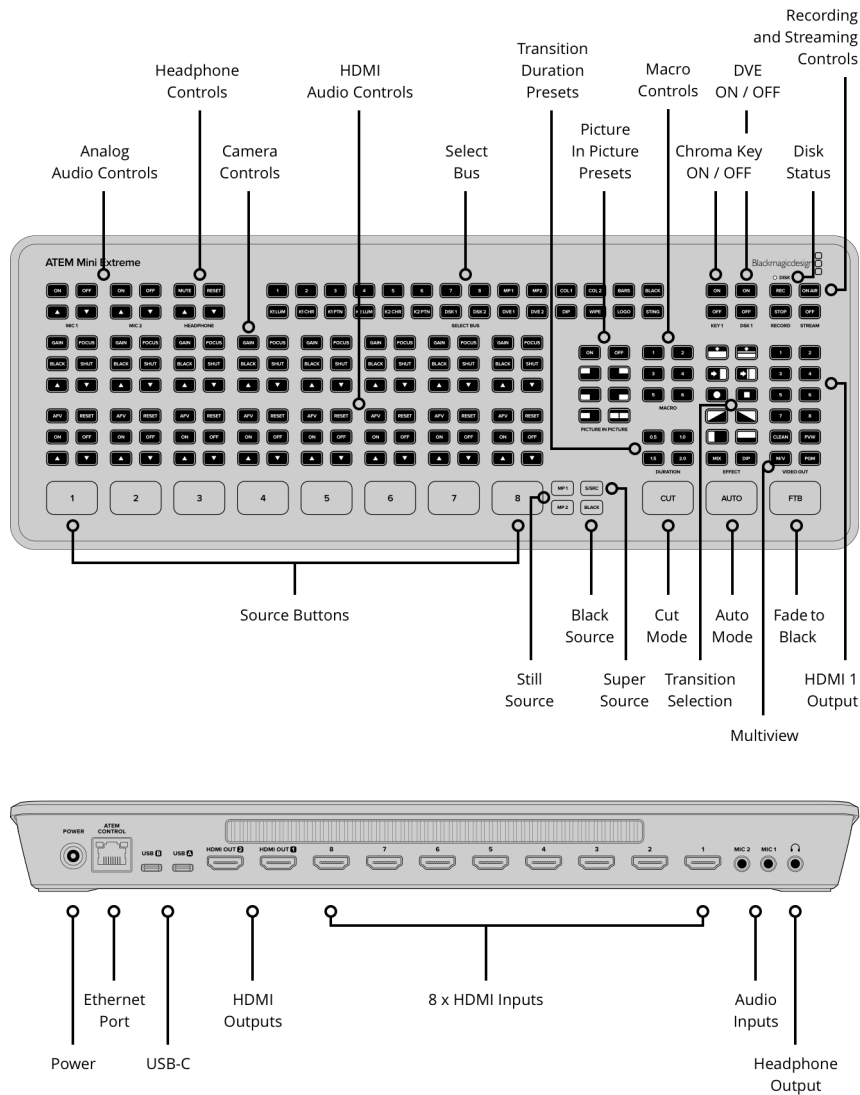

## Standards

### HD Video Input Standards

720p50, 720p59.94, 720p60.  
 1080p23.98, 1080p24, 1080p25,  
 1080p29.97, 1080p30, 1080p50,  
 1080p59.94, 1080p60.  
 1080i50, 1080i59.94, 1080i60.

### HD Video Output Standards

1080p23.98, 1080p24, 1080p25,  
 1080p29.97, 1080p30, 1080p50,  
 1080p59.94, 1080p60.

### Video Streaming Standards

1080p23.98, 1080p24, 1080p25,  
 1080p29.97, 1080p30, 1080p50,  
 1080p59.94, 1080p60.

### Ultra HD Video Standards

None

### Video Sampling

4:2:2 YUV

### Color Precision

10-bit

### Color Space

Rec 709

### HDMI Input Resolutions from Computers

1280 x 720p 50Hz, 59.94Hz and 60Hz  
 1920 x 1080p 23.98, 24, 25, 29.97, 30,  
 50, 59.94 and 60Hz  
 1920 x 1080i 50, 59.94Hz and 60Hz

### Colorspace Conversion

Hardware based real time.

---

## Product Specifics

### Upstream Keyers

4

### Transition Keyer

DVE only.

### DVE With Borders and Drop Shadow

2

### Downstream Keyers

2

### Total Number of Layers

9

### Interface

Minimum monitor resolution of 1366 x 768.

### Advanced Chroma Keyers

Up to 4

### Pattern Generators

5

### Linear/Luma Keyers

Up to 4

### Color Generators

2

---

## Audio

### Audio Mixer

11 input x 2 channel mixer. Selectable On/Off/Audio-Follow-Video per channel plus separate gain control per channel. Level and Peak metering. Plus new Fairlight audio enhancements: Compressor, Gate, Limiter, 6 bands of parametric EQ. Master gain control.

### Analog Input

Unbalanced stereo

### Analog Input Delay

Up to 8 frames

### Input Impedance

1.8k

### Max Input Level

+6dBV

### Mic Plug In Power

Available on both 3.5mm mini jack connections.

---

## Streaming

### Direct Streaming

ATEM Mini Extreme supports direct live streaming using Real Time Messaging Protocol (RTMP) over ethernet or a shared mobile internet connection over USB-C.

---

## Recording

### Direct Recording Video and Audio

USB-C 3.1 Gen 1 expansion port can record directly to external media.

### Video Recording

1 x Program out as H.264 .mp4 file at the Streaming quality setting and at the ATEM video standard with AAC audio.

### Media Format

Supports media formatted ExFAT (Windows/Mac) or HFS+ (Mac) file system.

---

## Multi View Monitoring

### Multi View Monitoring

Configurable to 16, 13, 10, 7 or 4 up views including Program, Preview, 8 HDMI inputs, SuperSource, Clean Feed, Media Player, Streaming Status, Recording Status and Audio Meters.

### Multi View Video Standard

HD

---

## Media Player

### Media Players

2

### Media Pool Still Image Capacity

20 with fill and key.

### Channels

Fill and key for each Media Player.

### Media Pool Still Image Format

PNG, TGA, BMP, GIF, JPEG and TIFF.

---

## Control

### Control Panel

Built in control panel. Software control panel with camera control included. Supports optional hardware panel.

### Control Panel Compatibility

Includes ATEM Software Control Panel. Also compatible with ATEM 1 M/E Advanced Panel, ATEM 2 M/E Advanced Panel and ATEM 4 M/E Advanced Panel. ATEM Mini Extreme can be configured using Blackmagic Videohub Hardware Panel Setup utility to route sources to destinations using Videohub Smart Control Pro and Videohub Master Control Pro.

### Control Panel Included

ATEM Software Control Panel included free for Mac 10.14 Mojave, Mac 10.15 Catalina, Mac 11 Big Sur or later and Windows 10 64 bit only.

### Control Panel Connection

Ethernet supports 10/100/1000 BaseT. Ethernet used for direct connection between panel and chassis or via network. ATEM Mini Extreme also supports direct USB-C connection. Ethernet or USB-C used for updating the software.

---

## Software

### Software Updates

Using USB or Ethernet connection directly connected to Mac OS X or Windows computers. Includes ATEM Switcher Utility.

### Configuration

Set via ATEM Software Control Panel, excluding ATEM chassis IP address which is set via the ATEM Switcher Utility connected via USB to chassis.

---

---

## Operating Systems



Mac 10.15 Catalina,  
Mac 11.1 Big Sur or later.



Windows 10, 64-bit.

---

## Power Requirements

### Power Supply


1 x External 12V power supply.

### Power Usage

36W

---

## Physical Specifications

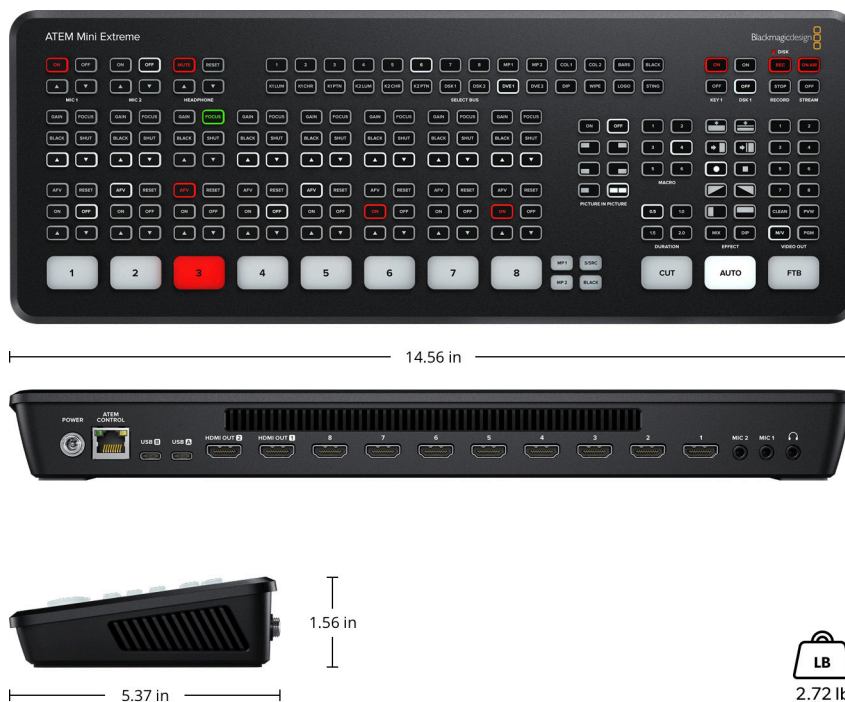

---

## Environmental Specifications

### Operating Temperature

5° C to 40° C (41° - 104° F)

### Storage Temperature

-10° to 60° C (14° to 140° F)

### Relative Humidity

0% to 90% non-condensing

---

---

## What's Included

AEM Mini Extreme

External 12V DC power supply with international socket adapters

---

## Warranty

12 Months Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2022, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller