

### Digital Plug-on Transmitter

DPR-A, DPR-A/E01-A1B1, DPR-A/E01-B1C1, DPR-A/E09-A1B1



#### DPR-A Digital Plug-on Transmitter

This unique digital plug-on transmitter design will match any microphone or line level source via a standard XLR connector. The DPR-A can tune in coarse or fine steps across the UHF television band with a selectable output power of 10, 25 or 50 mW. The purely digital architecture supports AES 256-CTR encryption for high level security applications.


The transmitter is specially designed with high efficiency digital circuitry for extended operating time on two AA batteries, with status indicated by a multi-color LED. An IR (infrared) port is included to simplify setup with IR enabled receivers. Updates can be made via SD card.

The input amplifier uses an ultra low noise op-amp for quiet operation. It is gain controlled with a wide range, dual envelope limiter, providing over 30 dB of headroom above full modulation. A 24-bit A-D converter digitizes the audio, then filters out supersonic noise above 21 kHz.

The DPR-A has an external SMA antenna jack, which accepts Lectrosonics steel flex wire AMM or elbowed AMJ series antennas.

Setup and adjustments are achieved through a backlit LCD, membrane switches and an intuitive menu structure. The DPR-A also offer hands free setup and adjustment using audible tones via the LectroRM mobile app. In this manner, the DPR-A can be powered on and off, and the frequencies and audio levels can be adjusted. Other features include input gain adjustment in 1 dB increments over a 55 dB range and adjustable low frequency audio roll-off for 3 dB down points at 25, 35, 50, 70, 100, 120 or 150 Hz to control subsonic and very low frequency audio content.

- Wideband UHF tuning range
- Accepts microphone or line level signals
- Selectable 5, 15, 48 volt phantom power
- Selectable 10/25/50 mW RF output power
- Adjustable low frequency roll-off
- Powered by two AA batteries
- IR (infrared) port for fast setup
- Remote controlled “dweedle” tones (audio tone set-up control)
- Time code jam sync with <1PPM accuracy
- Solid machined aluminum housing
- On board recording
- Encryption 256 Bit AES, CTR Mode

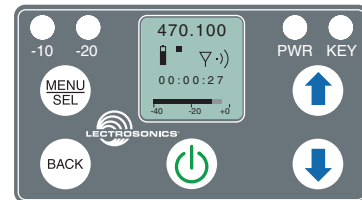

*Dual color LEDs indicate audio input level and the power LED changes color under low battery conditions.*

#### Recording Function

The record and transmit function can be used simultaneously (only in regions outside the United States). For US models, when the unit is transmitting and recording is turned on, the audio in the RF transmission will stop, but the battery status will still be sent to the receiver. The DPR-A can be jammed with timecode sync for each audio file alignment during post production and uses a temperature compensated crystal (TCXO) for <1 PPM accuracy.

**NOTE:** timecode is disabled when recording and transmitting simultaneously.

**WARNING:** Moisture, including talent's sweat, will damage the transmitter. Cover the DPR-A in our specially designed silicone cover (DPRACVR) or other protection to avoid damage.

# Specifications

## Transmitter

Operating Frequencies:	DPR-A: 470.100 - 607.950 MHz DPR-A/E01: 470.100 - 614.375 MHz DPR-A/E01-B1C1: 537.600 - 691.175MHz DPR-A/E09-A1B1: 470.100 - 614.375 MHz
Frequency Selection Steps:	25 kHz
RF Power output:	Selectable 10/25/50 mW E09 version: 10/25mW
Frequency stability:	$\pm 0.002\%$
Digital modulation:	8PSK
Spurious radiation:	US: Compliant with ETSI EN 300 422-1 v1.4.2
Equivalent input noise:	-125 dBV (A-weighted)
Input level:	Nominal 2 mV to 300 mV, before limiting Greater than 1V maximum, with limiting
Input impedance:	1K Ohm
Input limiter:	Dual envelope type; 30 dB range
Gain control range:	55 dB in 1 dB steps; digital control
Modulation indicators:	<ul style="list-style-type: none"><li>Dual bi-color LEDs indicate modulation of -20, -10, 0, +10 dB referenced to full modulation</li><li>LCD bar graph</li></ul>
Encryption:	AES 256-CTR (per FIPS 197 and FIPS 140-2)
Frequency Response:	25 Hz to 20 kHz, (+0, -3dB)
Low frequency Roll-off:	Adjustable for -3dB @ 25, 35, 50, 70, 100, 120 and 150 Hz
Input Dynamic Range:	110 dB (A), before limiting 125 dB (with full Tx limiting)
Controls & Indicators:	<ul style="list-style-type: none"><li>LCD w/membrane switches</li><li>LED audio level indicators</li></ul>
Audio Input Jack:	Standard 3-pin XLR (female)
Phantom Power:	5V @ 18 mA max., 15V @ 15 mA max. and 48 V @ 4 mA max., plus "OFF"
IR (infrared) port:	For quick setup by transferring settings from an IR enabled receiver
Antenna:	External SMA antenna jack
Battery:	Two 1.5 Volt AA (lithium recommended)
Battery Life:	Energizer Ultimate Lithium Batteries / AA Lithium, 48v phantom power engaged <ul style="list-style-type: none"><li>With Schoeps CMIT5U microphone: 6Hr:20min</li><li>With Sanken CS-1 microphone: 6Hr:45min</li><li>With Sennheiser MKH 416 P48: 6Hr:40min</li></ul> Duracell Ultra Batteries / AA Alkaline, 48v phantom power engaged <ul style="list-style-type: none"><li>With Schoeps CMIT 5 U microphone: 2Hr:20min</li><li>With Sanken CS-1 microphone: 2Hr:20min</li><li>With Sennheiser MKH 416 P48: 2Hr:20min</li></ul>
Weight:	7.8 ozs. (221 grams)
Dimensions:	4.21" L [excluding antenna: DPR-A] x 1.62" W x 1.38" H (106.9 L x 41.1W x 35.0 H mm)
Emission Designator:	170KG1E

**BATTERY CAUTION:** Risk of explosion if the battery is replaced by an incorrect type



The battery compartment door is hinged to the housing and remains attached to the transmitter when opened. It latches securely in place and applies pressure to the batteries when closed. The two AA batteries are connected in series through a conductive plate on the door.

## Recorder

Storage media:	microSDHC memory card (HC Type)
File format:	.wav files (BWF)
A/D converter:	24-bit
Sampling rate:	48 kHz
Recording modes/Bit rate:	HD mono: 24 bit - 144 kb/s
Input:	Type: Analog mic/line level compatible; servo bias preamp for 2V and 4V lavalier microphones
Input level:	<ul style="list-style-type: none"><li>Dynamic mic: 0.5 mV to 50 mV</li><li>Electret mic: Nominal 2 mV to 300 mV</li><li>Line level: 17 mV to 1.7 V</li></ul>
Timecode:	Connector: 3.5 mm TRS Signal voltage: 0.5 Vp-p to 5 Vp-p Input impedance: 10 k Ohms Accuracy: <1 PPM with TCXO Format: SMPTE 12M - 1999 compliant
Audio Performance:	Frequency response: 25 Hz to 20 kHz; +0.5/-1.5 dB Dynamic range: 110 dB (A), before limiting 125 dB (with full Tx limiting)
Distortion:	< 0.035%
Operating temperature range:	Celsius: -20 to 50 Fahrenheit: -5 to 122

Specifications subject to change without notice

