


# XS WIRELESS 1

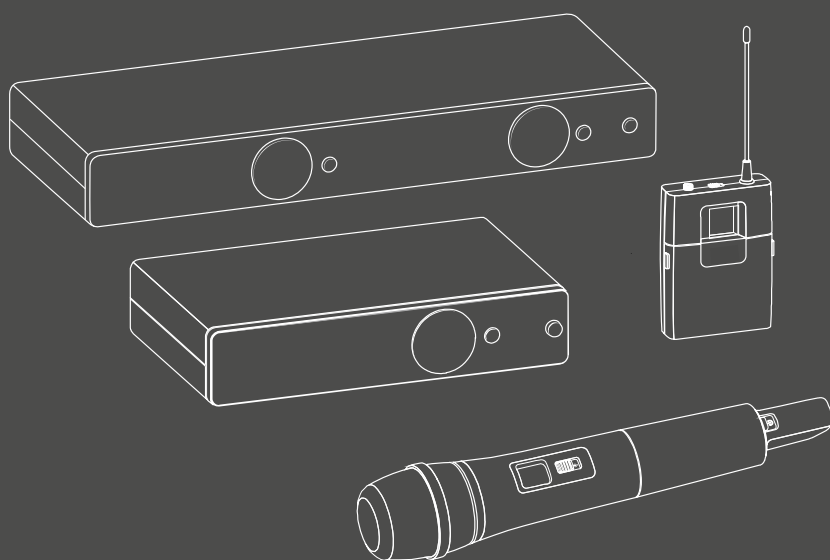

Technische Daten  
Specifications  
Caractéristiques techniques  
Dati tecnici  
Especificaciones técnicas  
Dados técnicos  
Technische specificaties  
Dane techniczne


Tekniska data  
Tekniska data  
Tekniset tiedot  
Τεχνικά χαρακτηριστικά  
Технические характеристики  
技术参数  
기술 데이터

 **SENNHEISER**

# Specifications

## System

Modulation	wideband FM
Frequency ranges	A: 548 to 572 MHz GB: 606 to 630 MHz B: 614 to 638 MHz BC: 670 to 694 MHz C: 766 to 790 MHz D: 794 to 806 MHz E: 821 to 832 MHz and 863 to 865 MHz K: 925 to 937.5 MHz
Switching bandwidth	up to 24 MHz
Frequencies	8 frequency banks, each with up to 10 factory-preset channels
Signal-to-noise ratio	≥ 103 dBA
THD	≤ 0.9%
Temperature range	operation: 0°C to +40°C storage: -20°C to +70°C
Transmitter synchronization	2.4 GHz, RF Power <3 mW, Low Power OQPSK (only active during synchronization)




## Receiver

	EM-XSW1	EM-XSW1 DUAL
Receiver principle	double superheterodyne	
Diversity principle	antenna switching diversity via internal antennas	
Sensitivity (at peak deviation)	< 3 μV at 52 dB(A) <sub>rms</sub> S/N	
AF frequency response	50 to 16,000 Hz (-3 dB)	
Max. AF output voltage (at peak deviation, 1 kHz AF)	1/4" (6.3 mm) jack socket (unbalanced): +6 dBu XLR socket (balanced): +12 dBu	
Audio adjustment range	45 dB, adjustable in 5-dB steps	
Power supply	12 V <sub>DC</sub> nom. / 300 mA	12 V <sub>DC</sub> nom. / 500 mA
Squelch	adjustable from 3 dBμV to 28 dBμV (combined with pilot tone)	
Line/Mic level	20 dB, switchable	
Housing material	rugged ABS housing	
Dimensions (W x H x D)	approx. 200 x 42 x 127 mm	approx. 320 x 42 x 127 mm
Weight	approx. 340 g	approx. 610 g



DE  
EN  
FR  
IT  
ES  
PT  
NL  
PL  
SE  
DK  
FI  
GR  
RU  
ZH  
KO  
COMPLIANCE

## Transmitters



	SK-XSW	SKM-XSW	
		e 825	e 835
RF output power	10 mW		
AF frequency response	50 to 16,000 Hz (Line) 80 to 16,000 Hz (Mic)	80 to 14,000 Hz	80 to 16,000 Hz
Audio input	3.5 mm jack socket	-	
Max. input voltage (Mic/Line) at 3% THD	typ. 1.5 V <sub>RMS</sub> Mic/ typ. 2.6 V <sub>RMS</sub> Line @ -30 dB Gain	-	
Power supply	2 AA size batteries, 1.5 V	2 AA size batteries, 1.5 V	
Operating time	approx. 10 hours		
Microphone type	-	dynamic	
Input sensitivity (capsule)	-	1.5 mV/Pa	
Pick-up pattern	-	cardioid	
Adjustment range of transmitter sensitivity	0 to -30 dB, adjustable in 10-dB steps		
Housing material	rugged ABS housing		
Dimensions	approx. 71 x 96 x 28 mm (W x H x D)	approx. 260 x 50 mm (L x Ø)	
Weight	approx. 95 g	approx. 245 g	

## Microphones



	ME 2-2	ME 3-II	e 908T
Transducer principle	condenser, pre-polarized	condenser, pre-polarized	condenser, pre-polarized
Sensitivity	20 mV/Pa	1.6 mV/Pa	0.6 mV/Pa
Pick-up pattern	omni-directional	cardioid	Cardioid
Max. SPL	130 dB	150 dB	147 dB


## NT 12-5CW power supply unit

Nominal input voltage	100 to 240 V~
Power frequency	50 or 60 Hz
Input current	≤ max. 200 mA
Nominal output voltage	12 V <sup>DC</sup>
Output current	≤ 500 mA
Standby power consumption	≤ 0.075 W @230 V AC ≤ 0.1 W @115 V AC
Energy efficiency level	DoE Level VI
Temperature range	0°C to +40°C
Storage temperature	-20°C to +60°C
Relative air humidity	max. 95%
Weight (without adapter)	approx. 65 g
Cable length	approx. 1.83 m


## Connector assignment

### EM-XSW1

1/4" (6.3 mm) mono jack plug



XLR-3 connector



### SK-XSW

3.5 mm jack plug



## Manufacturer Declarations

### Warranty

Sennheiser electronic GmbH & Co. KG gives a warranty of 24 months on this product. For the current warranty conditions, please visit our website at [www.sennheiser.com](http://www.sennheiser.com) or contact your Sennheiser partner.

### For Australia only

Sennheiser goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

This warranty is in addition to other rights or remedies under law. Nothing in this warranty excludes, limits or modifies any liability of Sennheiser which is imposed by law, or limits or modifies any remedy available to the consumer which is granted by law.

To make a claim under this warranty, contact

Sennheiser Technical Services and Spare Parts Sales  
c/o Linfox, Gate 3, 1 Fox Lane, Erskine Park, 2759, NSW Australia  
Phone: (02) 9910 6700  
email: [au-service@sennheiser.com](mailto:au-service@sennheiser.com)

All expenses of claiming the warranty will be borne by the person making the claim.

The Sennheiser International Warranty is provided by Sennheiser Australia Pty Ltd (ABN 68 165 388 312), Unit 3, 31 Gibbes Street Chatswood NSW 2067 Australia.

### In compliance with the following requirements

- WEEE Directive (2012/19/EU) 
- Battery Directive (2013/56/EU & 2006/66/EU) 

### Notes on disposal

The symbol of the crossed-out wheeled bin on the product, the battery/rechargeable battery and/or the packaging indicates that these products must not be disposed of with normal household waste, but must be disposed of separately at the end of their operational lifetime.

Further information on the recycling of these products can be obtained from your municipal administration, from the municipal collection points, or from your Sennheiser partner.

The separate collection of waste electrical and electronic equipment, batteries/rechargeable batteries and packagings is used to promote the reuse and recycling and to prevent negative effects caused by e.g. potentially hazardous substances contained in these products. Herewith you make an important contribution to the protection of the environment and public health.

#### CE Declaration of Conformity



- RoHS Directive (2011/65/EU)

Hereby, Sennheiser electronic GmbH & Co. KG declares that the radio equipment type XS WIRELESS 1 consisting of SKM-XSW, SK-XSW, EM-XSW1 and EM-XSW1 DUAL is in compliance with Directive 2014/53/EU

The full text of this declaration is available at [www.sennheiser.com/download](http://www.sennheiser.com/download).

Information about approvals and certifications can be found in the "Compliance" section.

#### Conditions and restrictions for using frequencies

There may be special conditions and restrictions for using frequencies in your country. Before putting the product into operation, find the information for your country at the following address: [www.sennheiser.com/frequency-information](http://www.sennheiser.com/frequency-information)

DE

EN

FR

IT

ES

PT

NL

PL

SE

DK

FI

GR

RU

ZH

KO

COMPLIANCE