


Runtime: SMT3000RM2UC

APC Smart-UPS, Line Interactive, 3kVA, Rackmount 2U, 120V, 6x NEMA 5-15R+2x NEMA 5-20R outlets, SmartConnect Port+SmartSlot, AVR, LCD

Smart-UPS

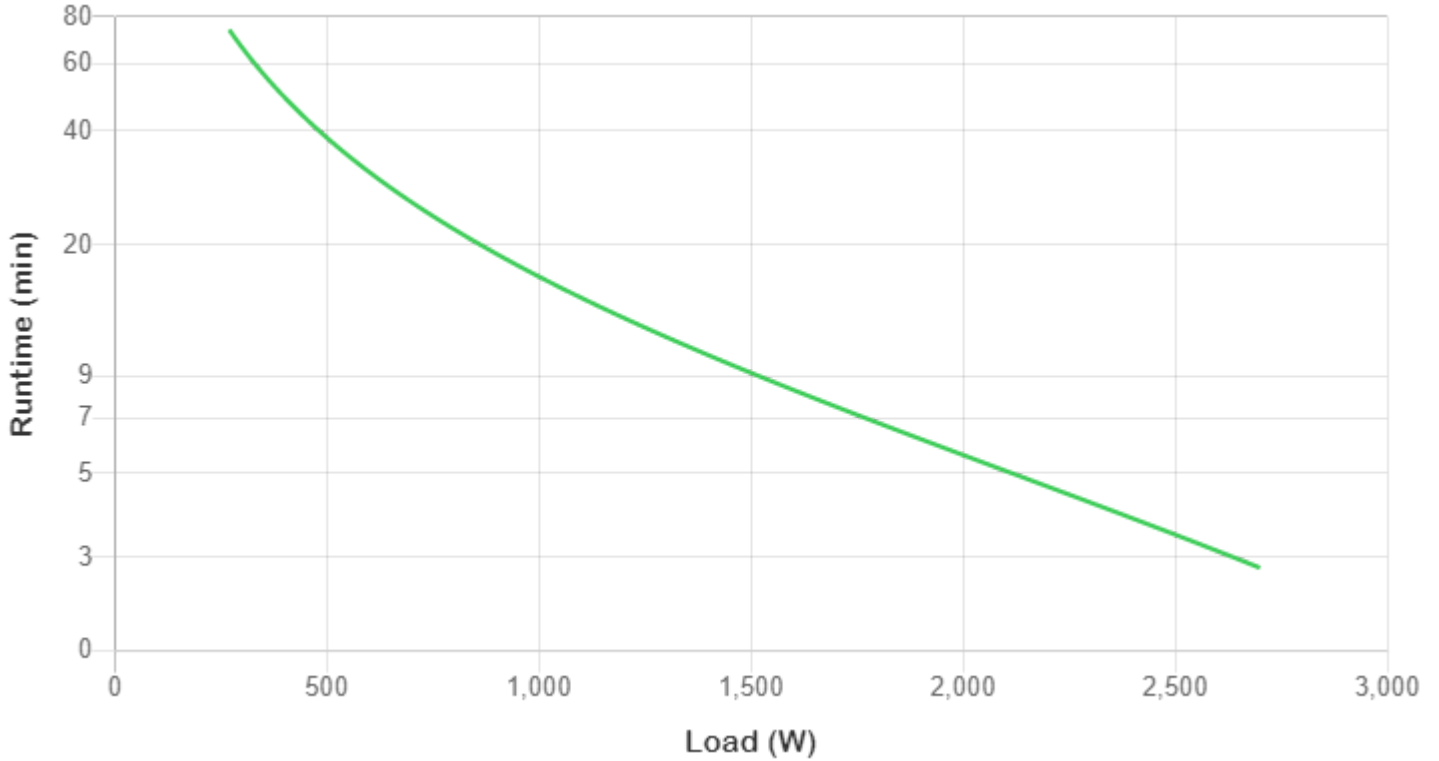

Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

Load / Runtime	270 W	500 W	1,000 W	1,500 W	2,000 W	2,500 W	2,700 W
SMT3000RM2UC	1 h 13 min	38 min	16 min 31 sec	9 min 12 sec	5 min 35 sec	3 min 27 sec	2 min 49 sec

<https://www.apc.com/us/en/products-runtime-graph/SMT3000RM2UC/APC-Smart-UPS-Line-Interactive-3kVA-Rackmount-2U-120V-6x-NEMA-5-15R-2x-NEMA-5-20R-outlets-SmartConnect-Port-SmartSlot-AVR-LCD>