


# Runtime: SMT750RM2UC

APC Smart-UPS, Line Interactive, 750VA, Rackmount 2U, 120V, 6x NEMA 5-15R outlets, SmartConnect Port+SmartSlot, AVR, LCD

Smart-UPS

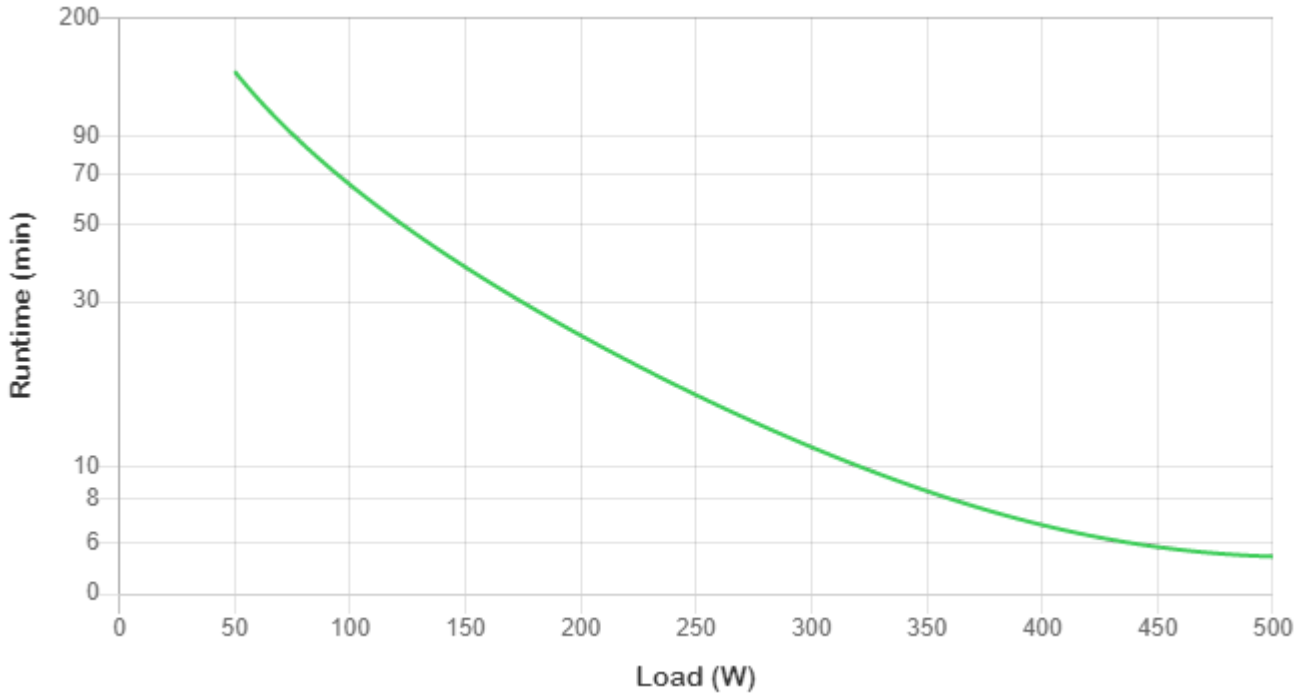

Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

Load / Runtime	50 W	100 W	150 W	200 W	250 W	300 W	350 W	400 W	450 W	500 W
<b>SMT750RM2UC</b>	2 h 19 min	1 h 5 min	37 min	23 min 55 sec	16 min 4 sec	11 min 20 sec	8 min 27 sec	6 min 44 sec	5 min 49 sec	5 min 27 sec

<https://www.apc.com/us/en/products-runtime-graph/SMT750RM2UC/APC-Smart-UPS-Line-Interactive-750VA-Rackmount-2U-120V-6x-NEMA-5-15R-outlets-SmartConnect-Port-SmartSlot-AVR-LCD>