


Runtime: SMTL750RM2UC

APC Smart-UPS, Line Interactive, 750VA, Lithium-ion, Rack/Tower, 2U, 120V, 6x NEMA 5-15R outlets, SmartConnect Port+SmartSlot, Short Depth, AVR, LCD

Smart-UPS

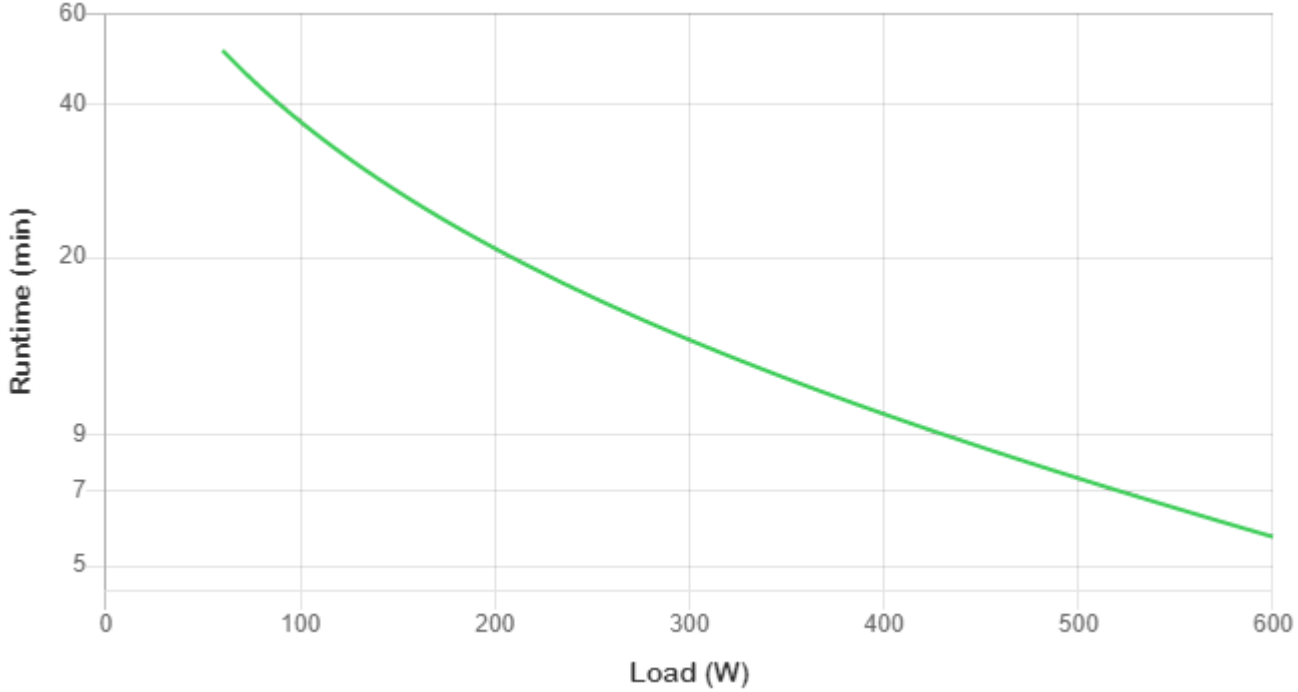

Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

Load / Runtime	60 W	100 W	150 W	200 W	250 W	300 W	350 W	400 W	450 W	500 W	550 W	600 W
SMTL750RM2UC	50 min 36 min	36 min	26 min 56 sec	20 min 51 sec	16 min 45 sec	13 min 49 sec	11 min 36 sec	9 min 53 sec	8 min 31 sec	7 min 24 sec	6 min 28 sec	5 min 41 sec

<https://www.apc.com/us/en/products-runtime-graph/SMTL750RM2UC/APC-Smart-UPS-Line-Interactive-750VA-Lithium-ion-Rack-Tower-2U-120V-6x-NEMA-5-15R-outlets-SmartConnect-Port-SmartSlot-Short-Depth-AVR-LCD>