


## Teranex Mini SDI to Analog 12G



---

Convert from 12G-SDI to Analog. Use SD, HD, 6G and 12G-SDI rates and convert to analog video output. Built in down converter lets you connect Ultra HD sources to component video equipment in SD or HD. Allows you to connect analog equipment including Betacam SP, VHS, and video monitors.

**\$495**

---

### Connections

#### SDI Video Inputs

1 x 12G-SDI SD/HD/2K/4K auto switching.

#### SDI Video Outputs

1 x 12G-SDI loop output.

#### Analog Video Outputs

Composite, Y/C or Component.

#### Analog Audio Outputs

2 channels professional balanced analog audio via XLR connectors. Right XLR can be configured for timecode output.

#### Digital Audio Outputs

4 channels professional 110Ω balanced digital audio via XLR connectors. Right XLR can be configured for timecode output.

#### Embedded Audio Support

16 channels.

#### Multi Rate Support


Automatic switching between SD/HD/2K and 4K.

#### Updates and Configuration

USB or Ethernet.

#### Reclocking

Yes

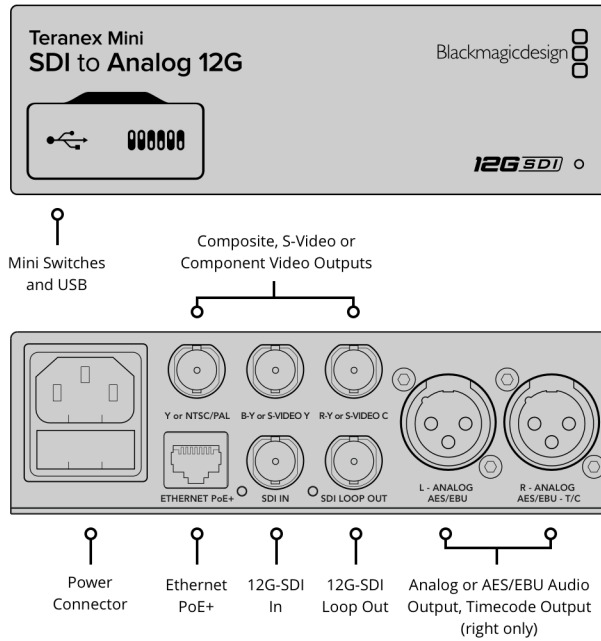

## Standards

### SD Video Standards

525i59.94 NTSC, 625i50 PAL

### HD Video Standards

720p50, 720p59.94, 720p60  
 1080i50, 1080i59.94, 1080i60  
 1080p23.98, 1080p24, 1080p25,  
 1080p29.97, 1080p30, 1080p50,  
 1080p59.94, 1080p60  
 1080PsF23.98, 1080PsF24,  
 1080PsF25, 1080PsF29.97, 1080PsF30

### 2K Video Standards

2Kp23.98 DCI, 2Kp24 DCI, 2Kp25 DCI  
 2KPsF23.98 DCI, 2KPsF24 DCI,  
 2KPsF25 DCI

### Ultra HD Video Standards

2160p23.98, 2160p24, 2160p25,  
 2160p29.97, 2160p30, 2160p50,  
 2160p59.94, 2160p60

### 4K Video Standards

4Kp23.98 DCI, 4Kp24 DCI, 4Kp25 DCI

### SDI Compliance

SMPTE 259M, SMPTE 292M,  
 SMPTE 296M, SMPTE 372M,  
 SMPTE 424M, SMPTE 425M  
 level A and B, SMPTE 2081-1,  
 SMPTE 2081-10, SMPTE 2082-1 and  
 SMPTE 2082-10

### SDI Video Rates

SDI video connections are auto switching between standard definition SDI, high definition level A and level B 3G-SDI, 6G-SDI, and 12G-SDI.

### SDI Video Sampling

4:2:2 and 4:4:4

### SDI Audio Sampling

Television standard sample rate of 48 kHz and 24-bit.

### SDI Color Precision

4:2:2 and 4:4:4

### SDI Color Space

YUV

### Analog Video Standards

525i59.94 NTSC, 625i50 PAL

### Analog Color Space

REC 601, REC 709

### Analog Color Precision

YUV 4:2:2 and RGB 4:4:4 in HD, 2K and 4K.

## Format Conversion

HD down conversion

---

## Software

### Software Control

Mac™ and Windows™ software upgrade via USB and Ethernet.

### Internal Software Upgrade

Via included updater application.

---

## Operating Systems



Mac 10.15 Catalina,  
Mac 11.1 Big Sur or later.



Windows 10, 64-bit.

---

## Settings Control

### Basic Settings Control

Mini Switches, USB and Ethernet via free software utility.

### Optional Front Panel Control

Front mounted Smart Panel with LCD, rotary knob and six settings buttons

---

## Power Requirements

### Power Supply

1 x built-in international AC power supply with IEC C14 inlet. IEC Power cable required. 100 - 240V AC Input.

### Power Over Ethernet

Can be powered via 48V DC using PoE+ (power over ethernet).

### Power Consumption

16 Watts

### Operational Voltage Range

100 - 240V AC

---

## Physical Specifications



---

## Environmental Specifications

### Operating Temperature

0° to 40°C (32° to 104°F)

### Storage Temperature

-20° to 60°C (-4° to 140°F)

### Relative Humidity

0% to 90% non-condensing

---

## What's Included

Teranex Mini SDI to Analog 12G

Welcome wallet with QR code for software download

---

## Warranty

3 year Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2022, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller