

Red Line Product

BOLiN

R9 Series
Indoor PTZ Camera



R9-418F

Redefining The Indoor PTZ Camera Experience

4K Pan Tilt Zoom Camera with 1.0-type Exmor R CMOS Sensor

The R9-418F indoor PTZ camera is equipped with Sony 1 Inch large 4K CMOS sensor image block with 18X zoom range Zeiss lens to provide 4K30/Full HD(1080P60) extreme high-quality Ultra High-Definition image to output HDMI, 6G-SDI, Optical SDI, and IP video streaming for ProAV and broadcast application.

R9-418F

KEY FEATURES



- Sony image block with 1 Inch large 4K sensor
- Zeiss Vario-Sonnar T lens with 18X zoom range
- Resolution 4K 2160p29.97, 1080i59.94, 1080p60
- IP Video Resolution: Up to 2160p30, 1080p60
- Video Output: Simultaneous 6G-SDI, HDMI, IP
- FPGA FAST HEVC Ultra Low Latency
- SFP Optical SDI video output
- Black Level, Color Matrix, Image Stabilizer
- RTSP, RTMP, SRT Supported
- Visca Over IP, Onvif, FreeD, Serial Control Supported

4K
30fps

ZOOM
18X

4K
1 Inch
CMOS

Black Level

RGB
CPY
Color matrix

OIS

HDMI
2.0

6G-SDI

OPTICAL



IP
H.265
HEVC

ULTRA LOW
LATENCY

VISCA
over
IP

RTSP
RTMP

FreeD

SRT
READY

ONVIF

NDAA
Compliant

IMAGE MODULE

- R9-418F 4K PTZ Camera produces brilliant broadcast-quality color images in 4K30 and Full HD with excellent low-light sensitivity.
- 1 inch type Exmor R CMOS large sensor, 14.2 Megapixels
- Zeiss Vario-Sonnar T lens, Zoom Range 18X at 4K, 24X at FHD
- Constant aperture of F2.8, excellent low light sensitivity
- Full HD footage can be captured at 1080p60 optimal for fast, spontaneous action events.
- Optical Image Stabilizer
- 23.98p/24p mode available for Cinematic video.
- Black Level
- Color Matrix
- ND Filter
- True WDR

SONY



FEATURES

4K

1 Inch

CMOS



- Equipped with Sony 1.0 Type 4K Image Block
- Excellent Low Light Sensitivity, Less Noise
- Better Dynamic Range
- Cinematic High-Quality Image
- Zeiss Lens Constant F2.8 Aperture



R9-418F Output Interface

Dual 6G-SDI	HDMI 2.0	SFP Optical SDI	Genlock
4K IP Streaming(HEVC)	RTSP, RTMP, RTMPS, SRT	True Dual-Output	FreeD
All Video with Audio Embedded	XLR Broadcast Audio Input	On-screen Character Generator	Serial/IP Control
High-Quality	Low Latency	Low Bandwidth	Power Output

Full Format and Standard

HDMI, SDI, IP Full Format
3840x2160P 30/29.97/25/24/23.98
1920x1080P 60/59.94/50/30/29.97/25/24/23.98
1920x1080i 60/59.94/50
1280x720P 60/59.94/50

SDI Standard
SMPTE 292M
SMPTE 296M (1.5Gb/s)
SMPTE 424M
SMPTE 274M
SMPTE 425-A (3Gb/s)
SMPTE 2081(6Gb/s)
With SMPTE352 SDI Metadata Supported

FEATURES


FreeD Protocol Integrated for VR/AR Video Production

FreeD helps provide all the axis data needed for a Bolin PTZ camera to intelligently and smoothly pan, tilt, and zoom while following designated objects and people. Broadcasters can combine Bolin's FreeD-enabled PTZ cameras with available, sophisticated software to automate complex camera operations with spectacular results. It is especially useful for virtual live video productions with baseband video feeds and, with Bolin PTZ cameras, with ultra-low latency AV Over IP streaming



Various Control Methods

- IP Control, Serial Control, IR Remote Control, Rest API-Software Control
- Protocol Supported: VISCA Over IP, ONVIF, VISCA, PELCO P/D, FreeD

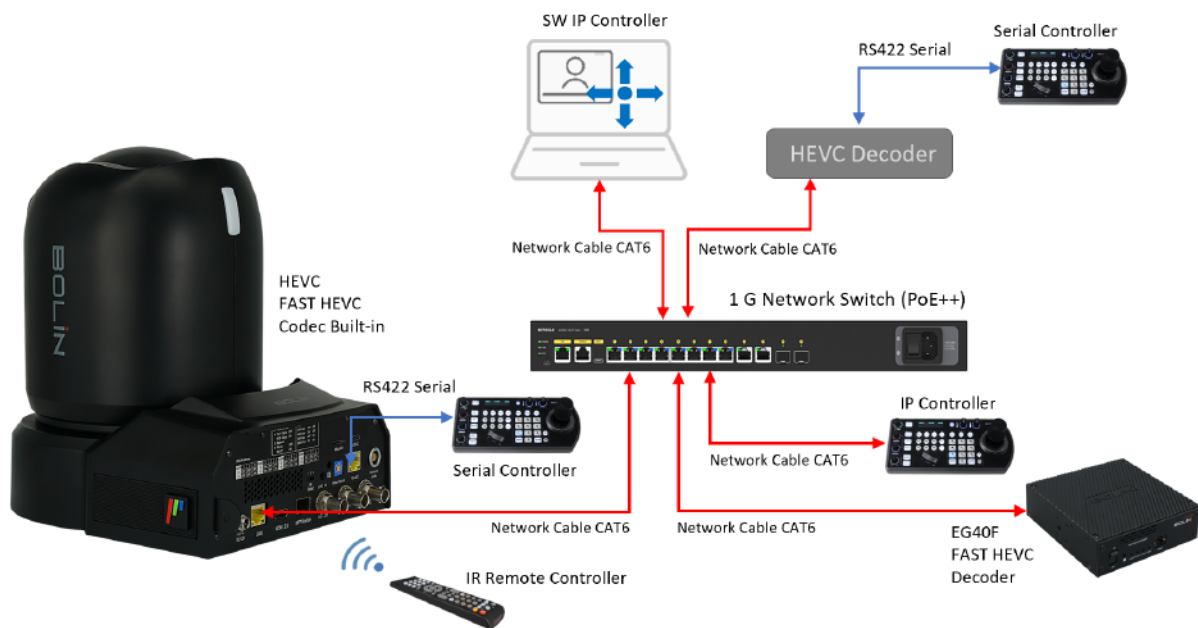


NDAA COMPLIANT



NDAA Section 889 Statement of Compliance: Bolin certifies it does not and will not provide "covered telecommunications equipment or services" or products containing "covered telecommunications equipment or services" complying with Section 889(a)(1)(B) of the National Defense Authorization Act (NDAA) for the Fiscal Year 2019 as a part of its offered products or services to customers.

OUTPUT

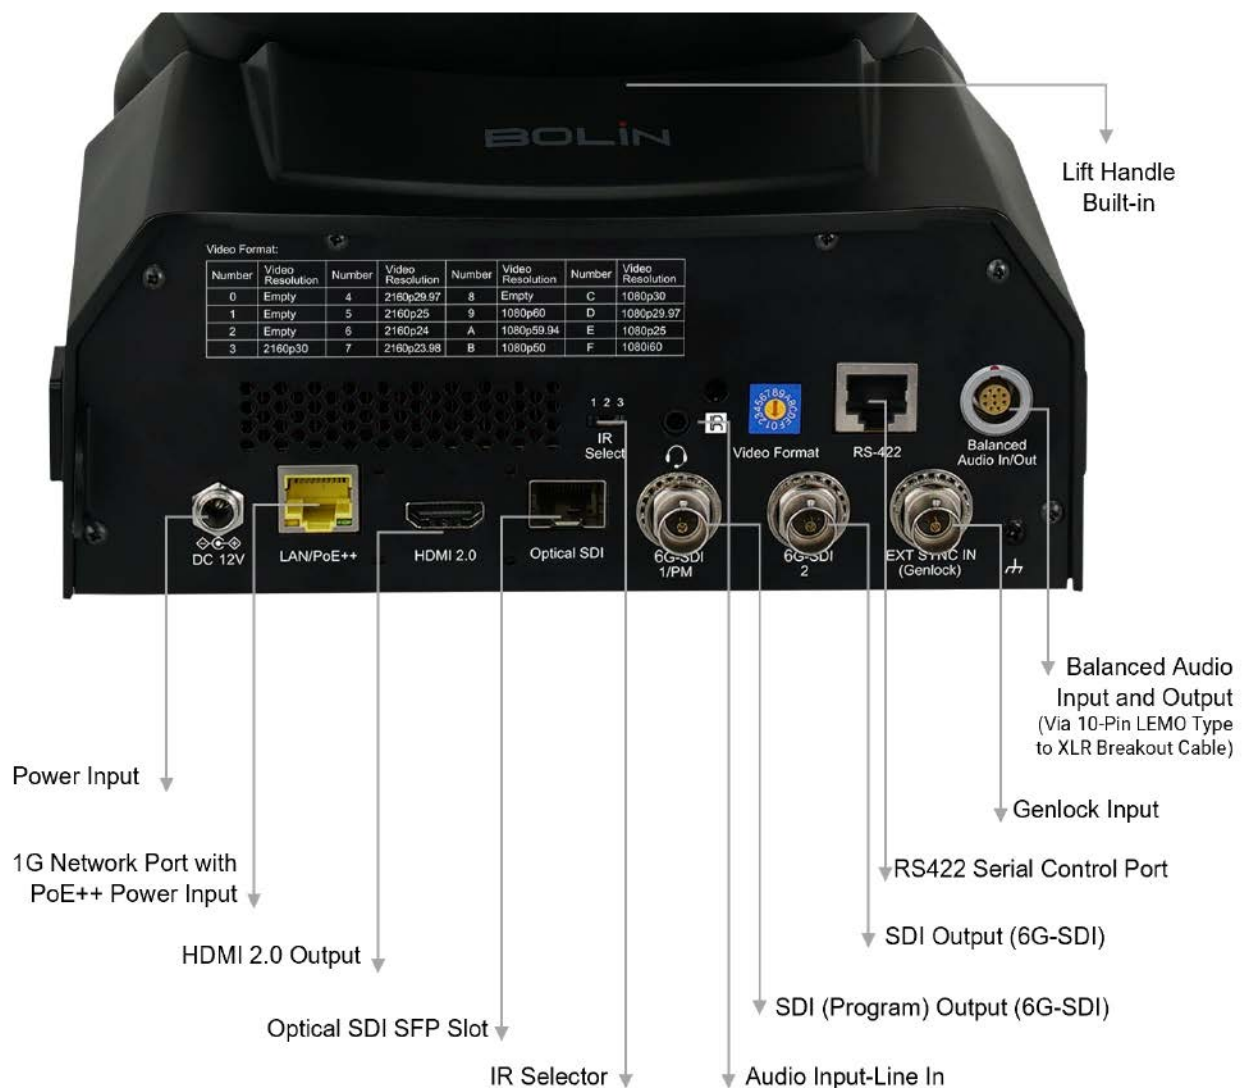

True Tri-Output

Simultaneously output SDI, HDMI, and IP, which can be set to independent formats for different application use. (The image shows video format model specific)



- Dual G-SDI
- HDMI 2.0
- 4K IP Streaming - AVC/HEVC
- SFP Optical SDI
- FreeD
- NDAA Compliant
- External Synchronization Genlock
- Audio embedded with all video output
- XLR broadcast audio input/output
- On-screen character generator
- Lifting Handle built-in



FAST HEVC

High Quality
Low Bandwidth
Low Latency

- Up to 4K60
- Dual stream, Multicast Support
- RTSP, RTMP, RTMPS, SRT, ONVIF
- IP Control protocol: Visca Over IP, Onvif
- Compatible With Standard AVC/HEVC
- Software Decode and Hardware Decode
- H.264/265 open platform, codec from AMD MPSoC

*FAST AVC/HEVC, FPGA Hardware Codec,
Utilizing AMD MPSoC to Deliver*

*Only **45Mbps** bandwidth that streaming **4K60** at 4:2:2 12bit
in Less Than **2 frame/s** Latency*


Comparison-The Facts of FAST HEVC Performance*

Foundation	Platform	Codec	1080p59.94/60			2160p59.94/60		
			Quality (Up To)	Latency (Point-to Point)	Bandwidth	Quality (Up To)	Latency (Point-to Point)	Bandwidth
H.264/265 AVC/HEVC	Software SOC	Stand HEVC	420SP(NV12)	4 frame/70ms	8Mbps	420SP(NV12)	25 frame/430ms	16Mbps
	Hardware SOC	Stand HEVC	4:2:2/12bit	2 frame/30ms	8Mbps	NA		
	Hardware FPGA	FAST HEVC	4:2:2/12bit(NV16)	2 frame/25ms	8-30Mbps	4:2:2/12bit(NV16)	2 frame/30ms	16-65Mbps
NDI	Hardware FPGA	Full NDI	4:2:2/10bit	3 frame/50ms	150Mbps	4:2:2/10bit	4 frame/70ms	300Mbps
Dante AV-Ultra	Hardware FPGA	JPEG 2K	4:2:2/12bit	1 frame/6ms	250Mbps	4:2:2/12bit	1 frame/8ms	550Mbps

*Results may vary depending on network configuration and management settings.

Open Platform


FAST HEVC Codec

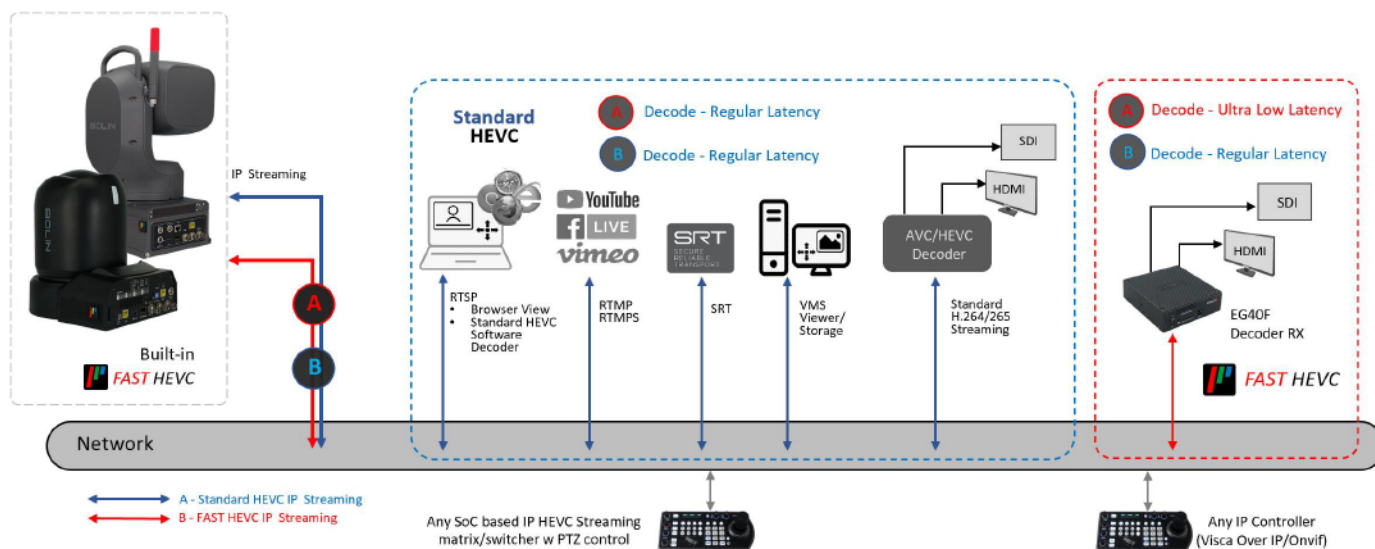

Bolin FAST HEVC codec camera can be decoded by standard HEVC decoder but will not have Ultra Low Latency

HEVC codec camera/device can be decoded by Bolin FAST HEVC decoder but will not have Ultra Low Latency

WORKFLOW

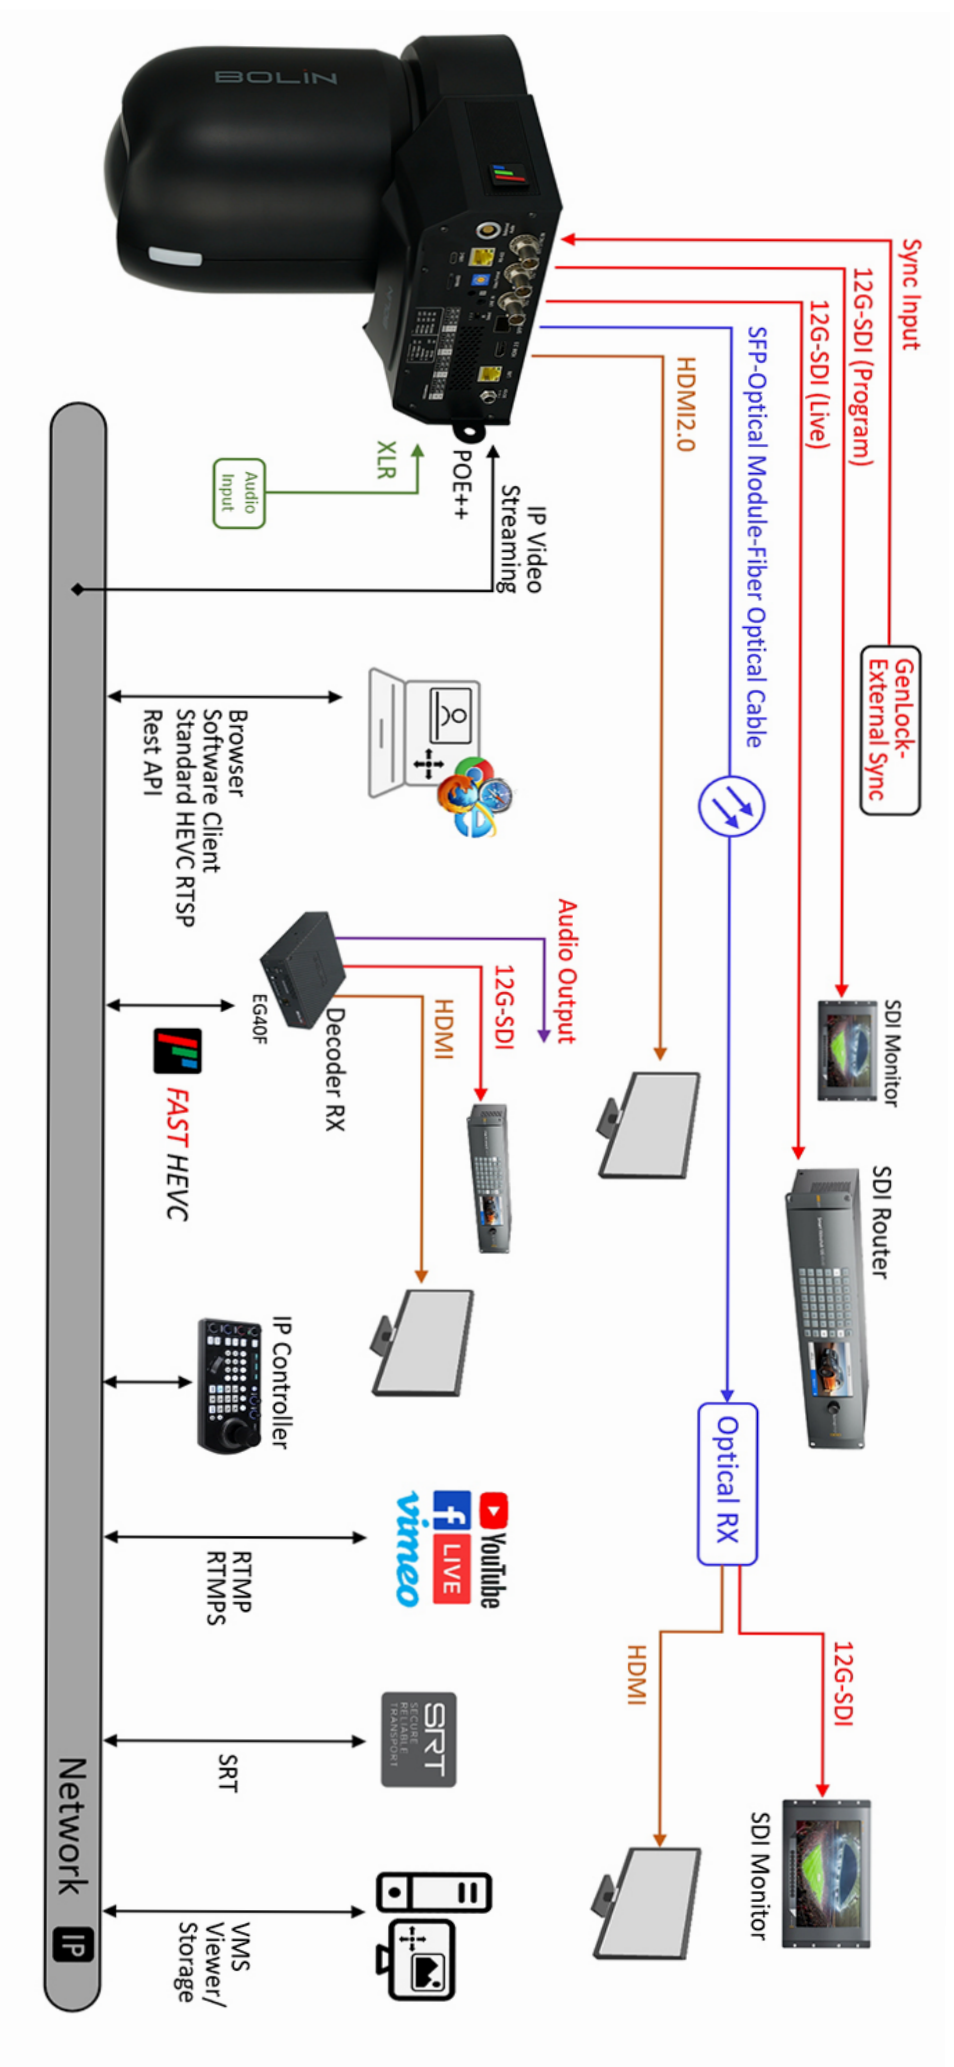

*Genlock Input On Decoder is model specific

MOVEMENT

Smooth and Accurate Movement

- PAN: 340° (-170° to +170°); Fully proportional speed 0.01° to 70°/s
- TILT: 120° (-30° to +90°); Fully proportional speed 0.01° to 60°/s
- Preset: 255 positions, Speed 70°/s, 0~5 Level Adjustable, Accuracy: 0.1°
- Picture Profile Preset
- Motionless Preset
- PTZ Trace Memory
- Quiet - Less than NC35



FEATURES

- On-screen character generator
- All firmware upgrade via IP
- Front and Rear Tally Light
- POE++ and 12VDC/AC
- Built-in handle
- Genlock
- HDMI cable secure mount
- Available Color: Black, White



Move, with you

- Industry-First unique portable body design
- Facilitates your video production installation.

Move • With You



SPECIFICATIONS

Model	R9-418F
Camera Image	18X 4K30/FHD
Image Maker	Sony Image Block
Image Sensor	1.0-type back-illuminated Exmor R CMOS sensor
Number of effective pixels	14.2 MP
Picture elements	3840 x 2160, 8.29 MP
Lens	Zeiss Vario-Sonnar T lens, Zoom Range 18X(4K)/24X(FHD)
Horizontal Angle of View	64.6° (Wide) - 6.1° (Tele),
Vertical Angle of View	39.2° (Wide) - 3.4° (Tele),
Focal Length	f=9.3 to 111.6mm, F2.8(Wide) ,F4.5(Tele)
Min. object distance	80mm (Wide), 1000mm (Tele)
Aperture	F2.8 Constant (W)~F4.5(T), 16 Steps
Min. Illumination	0.5 lx (1/30 sec, 50%, High Sensitivity On) 2.0 lx (1/30 sec, 50%, High Sensitivity Off)
Shutter Speed	1/1 sec to 1/10000 sec (28 steps)
Focus	Spot Focus, Auto Focus(Trigger/Interval), Manual Focus(Variable Speed), One Push Trigger, Near Limit,
White Balance	AUTO, ATW, Indoor, Outdoor, One Push WB, Manual WB, Outdoor Auto, Sodium Vapor Lamp (Fix/Auto/Outdoor Auto)
Exposure	Full Auto, Gain, Shutter Priority, Iris Priority, Manual, Bright
Features	High Sensitivity, Backlight Compensation, HLC, E-FLIP, Mirror, Day/Night
WDR	YES(130dB), Shown as VISIBILITY ENHANCER in OSD
ND Filter	Yes
Image Stabilizer	YES, Optical Image Stabilizer
Color Gain	Yes (15 step)
Color Hue	Yes (15 step)
Gamma	Standard/Straight/Pattern
Gamma Level	Yes (15 step)
Black Level	Yes (97 step)
Black Gamma	Yes (15 step)
Color Matrix	Off/Standard/High Saturation/FL light
Noise Reduction	On/Off (level 5 to 1 / Off, 6 steps), 2D/3D
S/N Ratio	≥50db
HLC	Yes
E-Flip	Yes
Defog	Yes, (off, low, mid, high)
High Sensitivity	Yes
Slow AE Response	Yes
Day/Night	Yes
Backlight Compensation	Yes
Mechanical	
Pan Movement	PAN: 340° (-170° to +170°); Fully proportional 0.05° to 70°/s
Tilt Movement	TILT: 120° (-30° to +90°); Fully proportional 0.05° to 60°/s
Speed Proportional	Pan/Tilt Speed proportional to zoom range
Preset Position	255 positions, Speed 70°/s, 0~5 Level Adjustable, Accuracy: 0.1°
Preset Memory	Picture Profile Preset-Preset Memory for image parameters: Backlight Compensation, White Balance, Auto Exposure, Bright, Iris, Shutter, Gain, Aperture, Effect, Noise Reduction, Mirror, Gamma, Ex-COMP, Color Hue, Contrast etc.)
Motionless Preset	YES, ON/OFF
PTZ Trace Memory	YES, 4
Cruise	YES, 12
Quietness	NC35 Compliant
Home Position	Yes
FreeD	Yes, FreeD protocol for AR/VR camera tracking, via IP
Environmental	Indoor
Interface	
HDMI Video Output	HDMI 1.4 Type A
SDI Video Output	12G-SDI, 75Ω BNC x 2, SDI Clean / SDI PM for output having OSD display
SDI Optical Fiber Output	Optical SDI SFP module support up to 12G-SDI (Module Excluded). Detachable slot, Connector: Duplex LC (optional via ST, LC or SMPTE) Laser Unit: Single-mode 1,310nm DFB-LD transmitter and PIN receiver Complaint with MSA SFP+ Specification SFF-8402.
Network LAN Port	RJ45X1, Standard 10M/100M/1000M Base-TX Ethernet, LAN connector for IP control/video output/audio output/System FW
Synchronization System	Internal/External synchronization (BBS/Tri-level sync)
External Sync Input	Genlock, BNC connector, BBS (Black Burst Sync), tri-level sync supported
Audio Input	Balanced XLR (Hirose Connector/via Atomos 10-Pin LEMO Type to XLR Breakout Cable) with 48V Phantom power 3.5mm TRRS for bidirection audio intercom (Preserve)
Audio Output	Balanced XLR (via 10-Pin LEMO Type to XLR Breakout Cable)(Preserve), embedded with HDMI, SDI, and IP 3.5mm TRRS for bidirection audio intercom (Preserve)
Tally Light	Red, Green Color/Front and Rear
Dip Switch	Video Resolution Dip Switch x1
System Firmware Upgrade	Upgrade via IP for camera system MCU, FPGA and Encoder
Power Connector Type	INPUT: DC12V, connect with screw secure (Type - 5.5mm×2.1mm Male DC Power Plug Connector & Screw Lock Female Panel) INPUT: RJ45, PoE++ (IEEE802.3bt)
Control Interface	RJ45X1-RS422, RJ45X1-IP Control, IR Remote Control
Control Protocol	Serial: VISCA, PELCO P/D; IP: VISCA Over IP, ONVIF; FreeD, API

SPECIFICATIONS

Model	R9-418F
Codec	 Hardware FPGA Based FAST HEVC
HDMI Video Signal System	
HDMI Video Format	3840x2160P 30/29.97/25/24/23.98 1920x1080P 60/59.94/50/30/29.97/25/24/23.98 1920x1080i 60/59.94/50 1280x720P 60/59.94/50
Color Precision	12bit(HDMI), YUV4:2:2
Color Space	YUV, RGB
OSD Menu Display	Yes
On-Screen Title	Yes, video embedded On-Screen title character generator; Image/Logo Insert Screen Display with IP Image Stream
SDI Signal Format	
SDI Video Output	6G-SDI
SDI Video Format	3840x2160P 30/29.97/25/24/23.98 1920x1080P 60/59.94/50/30/29.97/25/24/23.98 1920x1080i 60/59.94/50 1280x720P 60/59.94/50
Color Precision	10bit(SDI), YUV 4:2:2
Color Space	YUV
Standard	SMPTE 292M, SMPTE 296M (1.5Gb/s), SMPTE 424M, SMPTE 274M, SMPTE 425-A(3Gb/s) SMPTE 2081(6Gb/s), with SMPTE352 SDI Metadata Supported
True Dual Output	HDMI and SDI signal can be output with different format
OSD Menu Display	Yes
On-Screen Title	Yes, video embedded On-Screen title character generator
Network	
Video Compression	AVC-H.264/HEVC-H.265/MJPEG by FPGA
IP Resolution/Frame Rate	3840x2160P 30/29.97/25/24/23.98 1920x1080P 60/59.94/50/30/29.97/25/24/23.98 1920x1080i 60/59.94/50 1280x720P 60/59.94/50
True Dual Output	IP, HDMI, and SDI signal can be set with different format
IP Protocols	TCP/IP, IGMP, ICMP, ARP, QoS, SNMP, UDP, HTTP, DNS, DHCP, FTP, NTP, UPNP, SRT
Application Protocols	RTMP(S), RTSP, RTSP Encryption, RTP Streaming (Unicast, Multicast), SRT, MPEG-TS over UDP, MPEG-TS over RTP
Color Format	YUV4:2:0 8bit, YUV4:2:2 8bit, YUV4:2:2 10bit
Multi-stream	2 stream
Audio Compression	32-128Kbps(AAC-LC) Selectable
OSD	Customized OSD
Compatible Integration	ONVIF2.4 (Profile S), VISCA Over IP
Bandwidth (results may vary depending on network configuration and management settings.)	128Kbps-60Mbps, 4kp60 12 bit 4:2:2 10-20Mbps, 1080p60 12 bit 4:2:2
Latency (Overall latency may increase depending on network configurations)	2-3 frame (e.g. 1080p60 latency is < 120ms glass to glass)
Browser Support	Cross Browser Compatibility - HTML5 support for Microsoft Edge, Google Chrome, Firefox, and Safari
General	
Operating Temperature	-10 °C to 50 °C (14°F to 122°F)
Operating Humidity	≤80% Suitable for Use (no condensation)
Power Input	DC12V, POE++ (IEEE802.3 bt Type 4 Calss 7)
Power Consumption	Min: 40W (Static state with no movement) Max: 46W (Fully loaded operation)
Installation Method	Stand-alone (Upright) or suspended (Pendent) or Tripod
Mount	Ceiling mount, Wall mount, Tripod
Handle	Built-in for portable use application
Size of Tripod Screw Hole	1 x 1/4" safety bond point
Body Color	Black, White
Dimension-Camera	201*253*249mm(W*D*H), 201*253*256(with feet mats)
Net Weight	3.8kg (8.36lb)
Accessories Included	IR Remote controller x1, Power adapter and power cord (US, EU, UK), Mounting screws x3, RJ45 to RS422 Extension cable
Certificate	CE, FCC, IC, UKCA, ROHS, WEEE

ACCESSORIES

Items marked * are optional to purchase



VCC-RC-2
IR Remote Controller



P12-4L
12VDC 4A Power Adapter



EG40N
*NDI Decoder



C-PMSB
*Pendant Mount for Drop Ceiling
/Hard Surface Ceiling



C-WM3B
*Wall Mount Bracket-Size 3



C-WM3B-CV
*Wall Mount Cover-Size 3



C-WPLB
*Wall Mount Plate



BL-CM-01
*Ceiling Mount Bracket



BL-PP97
*97W POE POWER INJECTOR



BLA-10
*LEMO connector
10Pin Mini to XLR L/R In/Out




B-OSM-12
*Optical SFP Module Transceiver
12G-SDI

ORDER INFORMATION

- Visit Bolin Technology Website

DIMENSIONS

Unit: mm

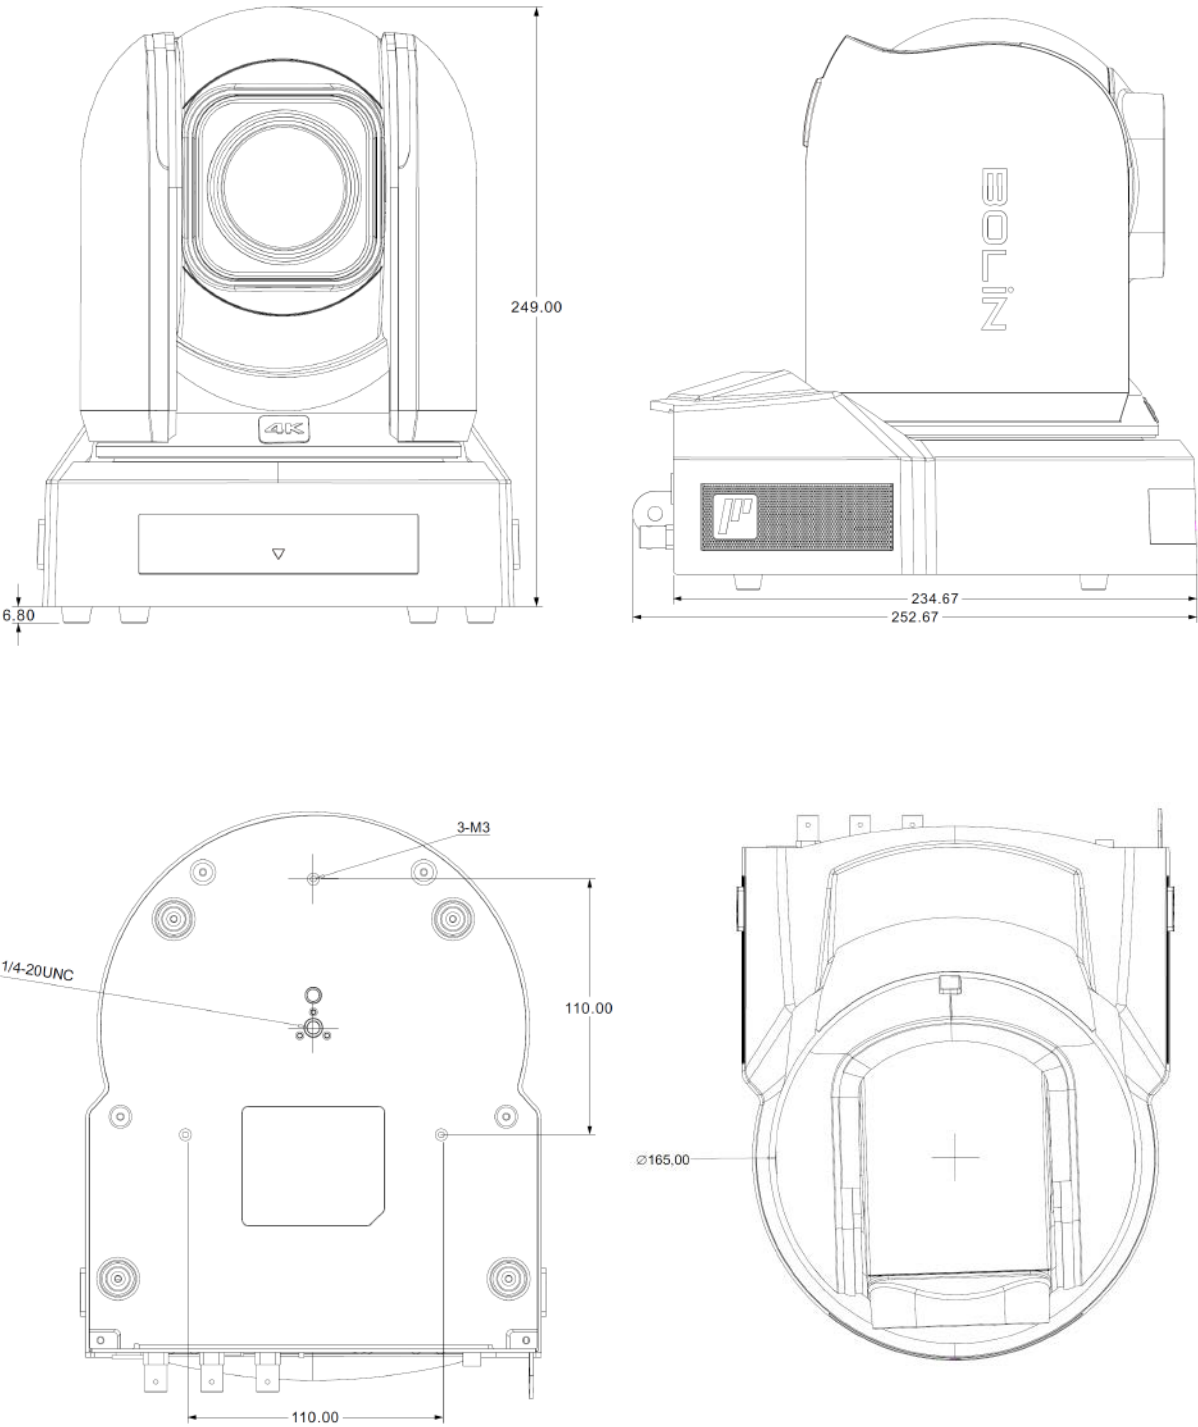

All models and specifications are subject to change without notice.
All brand names and registered trademarks are the property of their respective owners.