


OL1500RTXL2U RUNTIME

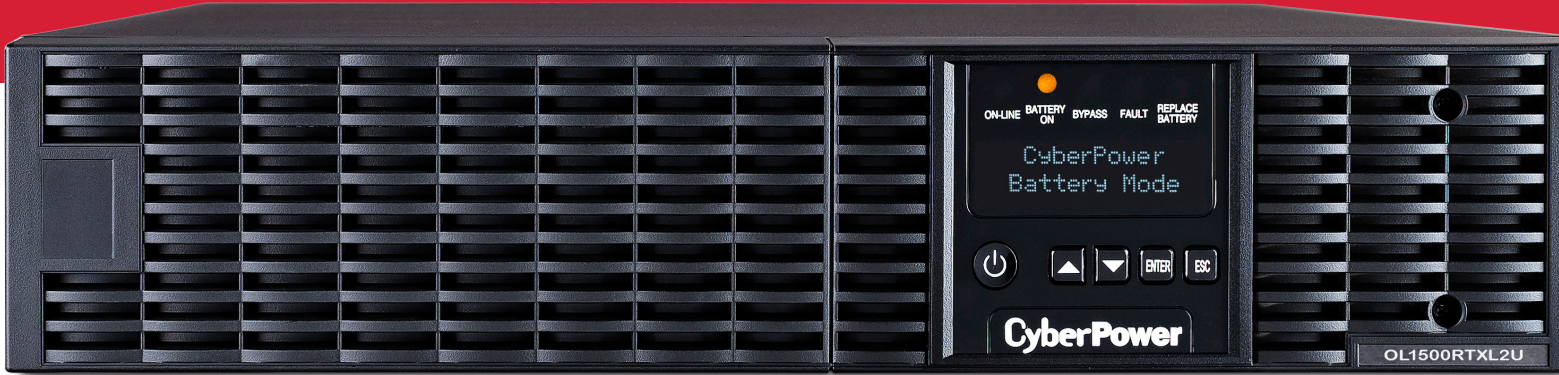


FEATURES

- 1500VA / 1350W Sine Wave UPS
- Double-Conversion Topology
- Smart Battery Management that extends life and reduces heat
- GreenPower UPS™ ECO Mode improves efficiency
- 2U Rack Mount / Tower Convertible
- Extendable LCD Panel
- Remote Management Options
- 8 Outlets / USB, Serial and EPO Ports
- EMI /RFI Filters
- PowerPanel® Business Edition Software

RUNTIME IN MINUTES								
Model/Watts	50W	100W	200W	300W	400W	500W	600W	700W
OL1500RTXL2U	137	88	42	28	22	16	14	10
OL1500RTXL2U +1BP	499	304	150	104	88	67	57	42
OL1500RTXL2U +2BP	882	560	275	170	150	121	103	79
OL1500RTXL2U +3BP	1268	810	416	264	218	166	146	117
OL1500RTXL2U +4BP	1663	1063	562	362	307	224	186	148
OL1500RTXL2U +5BP	2066	1320	702	460	390	294	243	179
OL1500RTXL2U +6BP	2474	1581	841	562	476	359	304	223
OL1500RTXL2U +7BP	2888	1845	981	659	564	426	361	271
OL1500RTXL2U +8BP	3305	2112	1123	755	650	495	419	318
OL1500RTXL2U +9BP	3727	2381	1266	851	733	565	478	363
OL1500RTXL2U +10BP	4152	2653	1411	948	816	633	539	409

OL1500RTL2U RUNTIME CONT.

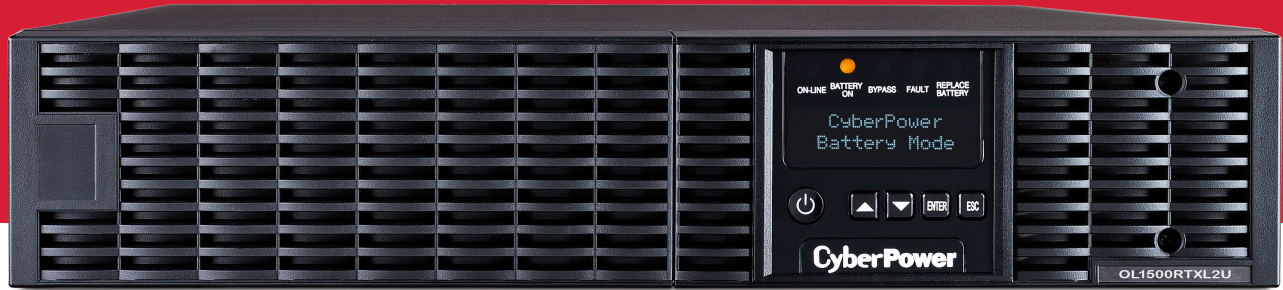

RUNTIME IN MINUTES							
Model/Watts	800W	900W	1000W	1100W	1200W	1300W	1350
OL1500RTL2U	9.1	7.2	6.3	4.9	4.9	3.6	3.4
OL1500RTL2U +1BP	37	31	29	23	23	17	16
OL1500RTL2U +2BP	69	57	51	42	42	34	32
OL1500RTL2U +3BP	102	85	77	64	64	50	47
OL1500RTL2U +4BP	132	114	104	85	85	68	65
OL1500RTL2U +5BP	160	139	128	108	108	86	83
OL1500RTL2U +6BP	190	162	150	129	129	105	100
OL1500RTL2U +7BP	230	187	171	147	147	123	118
OL1500RTL2U +8BP	272	222	198	165	165	138	133
OL1500RTL2U +9BP	314	257	230	184	184	153	148
OL1500RTL2U +10BP	354	295	264	211	211	168	162