


R-5T Triple 5.5" LCD Monitors supporting up to 12G-SDI



Main Body Dimensions

Main Body 439 x 87.5 x 118.7 (mm) / 17.28 x 3.44 x 4.67 (inch)
With Rack Mount Kit 480.2 x 87.5 x 141.7 (mm) / 18.91 x 3.44 x 5.58 (inch)
Weight 2.86Kg / 6.3lbs

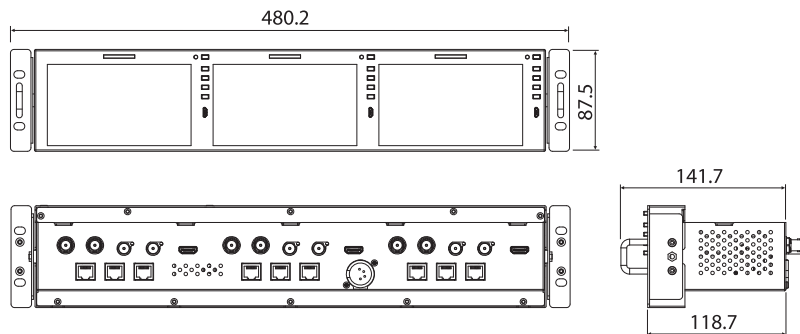

Product Highlights

- 3 x 5.5" Full HD LCD Screen
- 12G/6G/3G-SDI Input & Output
- HDR (PQ, HLG, S-Log3)
- Waveform / Vectorscope
- 16ch Audio Level Meter
- Marker
- Dynamic UMD
- Timecode Display
- Luma(Y') Zone Check
- Focus Assist
- 1:1 Scan / Zoom
- Blue/Mono Only
- Luma(Y'') Zone Check
- H/V Delay
- Tally

Size	5.5"
Resolution	1920x1080(16:9)
Pixel Pitch	0.0639 mm
Color Depth	16.7M Colors
Viewing Angle(Typ.)	160°(H) / 160°(V)
Luminance (Max.)	500nits (center)
Contrast Ratio	1000:1
Display Area	122.7(H)x69.0(V)mm
Input	
2 x BNC	SDI Input (12G-SDI x 1 / 3G-SDI x 1)
1 x HDMI	HDMI Input
Output	
2 x BNC	SDI Output (12G-SDI x 1 / 3G-SDI x 1)
Input Signal	
12G-SDI	12Gb/s
6G-SDI	6Gb/s
3G-SDI	2.970Gb/s
HD-SDI	1.485Gb/s
SD-SDI	270Mb/s
HDMI	1080p(60)/1080i(60)/720p(60)/480p(60) /576p(50)
SDI Input Signal Formats	
SMPTE ST 2082	3840x2160(60/50/59.94p)
SMPTE ST 2081	3840x2160 (30/25/24p/23.98p/29.97p)
	1080i(60/59.94/50)
SMPTE-425M-A/B	1080p(60/59.94/50/30/29.97/25/24/23.98/30sF/29.97sF/25sF/24sF/23.98sF)
SMPTE-274M	1080i(60/59.94/50) 1080p(30/29.97/25/24/24sF/23.98/23.8sF)
SMPTE-296M	720p(60/59.94/50)
SMPTE-125M	480i(59.94)
ITU-R BT.656	576i(50)
Power	DC 12V 2.5A
Power Consumption (Approx.)	35W
Operating Temperature	0°C to 45°C (32°F to 113°F)
Storage Temperature	-20°C to 60°C (-4°F to 140°F)
Included Accessories	AC Power Cable Rack Mountable Kit DC Power Adaptor