


Item #	Qty	Description	MKPS-1	MKPS-2	MKPS-3	MKPS-4	MKPS-5
1	2	L-Bracket	2.375"	2.875"	3.5"	4"	4.5"
2	2	Saddle					
3	2	U-Bolt					
4	4	Flat Washer	3/8" x 1"	1/2" x 1-1/4"	1/2" x 1-1/4"	1/2" x 1-1/4"	1/2" x 1-1/4"
5	4	Lock Washer	3/8"	1/2"	1/2"	1/2"	1/2"
6	4	Hex Nut	3/8-16	1/2-13	1/2-13	1/2-13	1/2-13
7	4	Lock Washer	3/8"				
8	4	Hex Head Bolt	3/8-16 x 1-1/4"				

Installation instructions

- Remove only 4 of the round head bolts that come pre-installed on the antenna as shown.
- Remove the "Drain hole" screw indicated below.
- Attach L-Bracket to antenna as shown using hardware provided.
- Install antenna to mast as shown using hardware provided.
- Tighten all hardware to specified torque.
(See chart below)

**Horizontal
polarization**

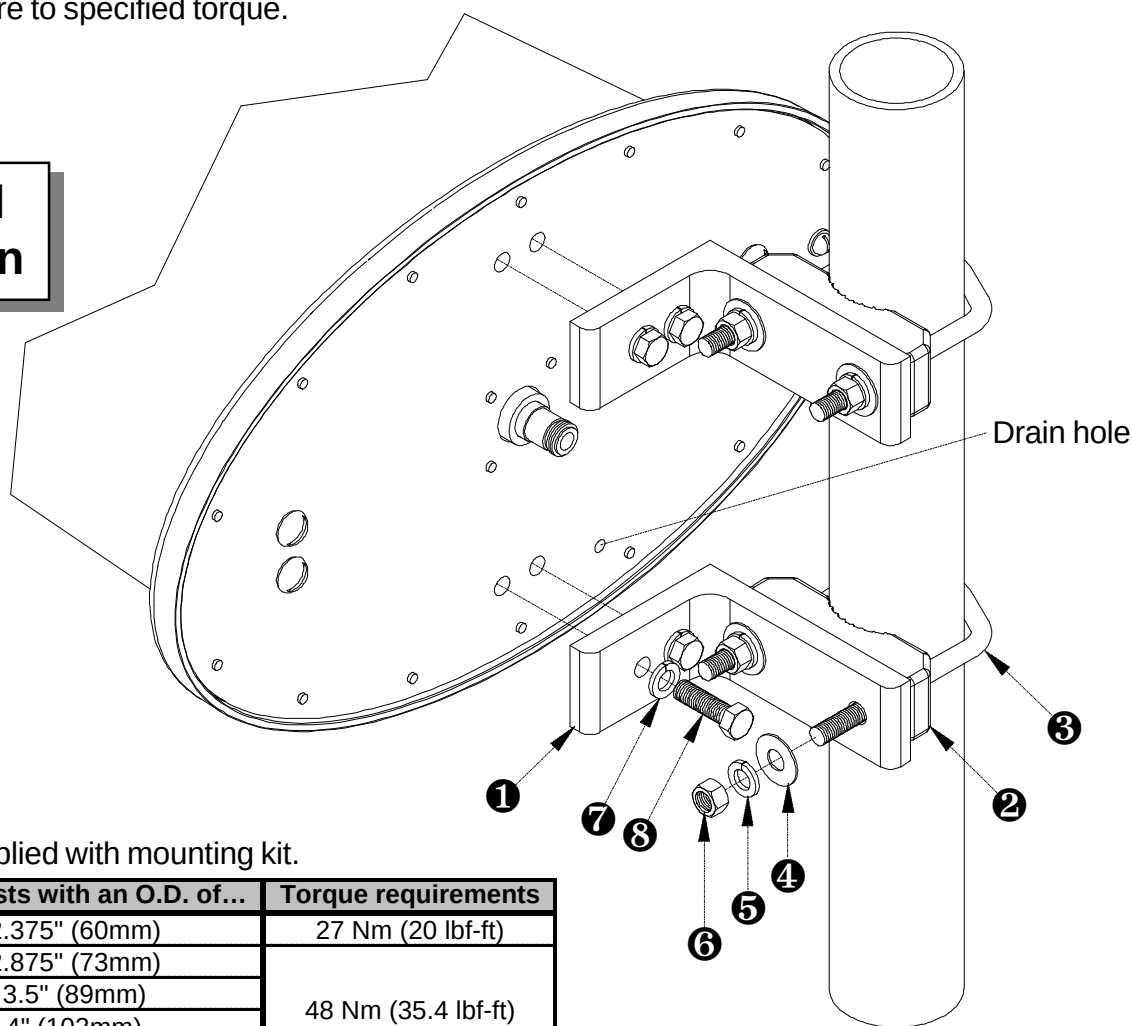

Note: Mast's not supplied with mounting kit.


Model #	Fits masts with an O.D. of...	Torque requirements
MKPS-1	2.375" (60mm)	27 Nm (20 lbf-ft)
MKPS-2	2.875" (73mm)	48 Nm (35.4 lbf-ft)
MKPS-3	3.5" (89mm)	
MKPS-4	4" (102mm)	
MKPS-5	4.5" (114mm)	

Antennas may be installed on either side of mast.

Item #	Qty	Description	MKPS-1	MKPS-2	MKPS-3	MKPS-4	MKPS-5
1	2	L-Bracket	2.375"	2.875"	3.5"	4"	4.5"
2	2	Saddle					
3	2	U-Bolt					
4	4	Flat Washer	3/8" x 1"	1/2" x 1-1/4"	1/2" x 1-1/4"	1/2" x 1-1/4"	1/2" x 1-1/4"
5	4	Lock Washer	3/8"	1/2"	1/2"	1/2"	1/2"
6	4	Hex Nut	3/8-16	1/2-13	1/2-13	1/2-13	1/2-13
7	4	Lock Washer	3/8"				
8	4	Hex Head Bolt	3/8-16 x 1-1/4"				

Installation instructions

- Remove only 4 of the round head bolts that come pre-installed on the antenna as shown.
- Remove the "Drain hole" screw indicated below.
- Attach L-Bracket to antenna as shown using hardware provided.
- Install antenna to mast as shown using hardware provided.
- Tighten all hardware to specified torque.
(See chart below)

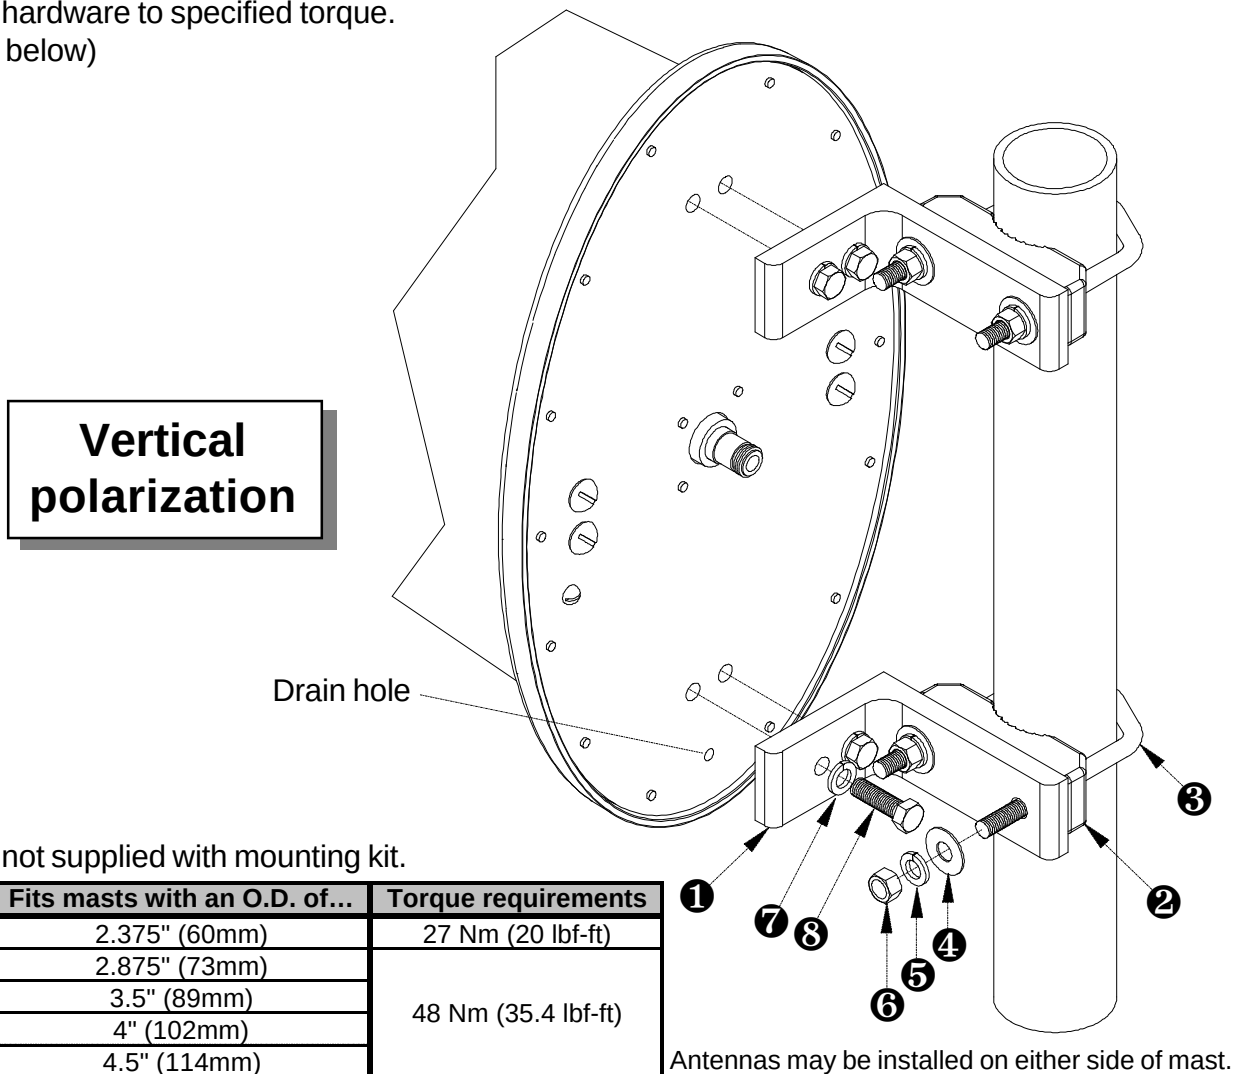

Note: Mast's not supplied with mounting kit.

Model #	Fits masts with an O.D. of...	Torque requirements
MKPS-1	2.375" (60mm)	27 Nm (20 lbf-ft) 48 Nm (35.4 lbf-ft)
MKPS-2	2.875" (73mm)	
MKPS-3	3.5" (89mm)	
MKPS-4	4" (102mm)	
MKPS-5	4.5" (114mm)	

Antennas may be installed on either side of mast.

Kathrein Inc. , Scala Division

Post Office Box 4580
Medford, OR 97501 (USA)
www.kathrein-scala.com

Phone: (541) 779-6500
Fax: (541) 779-3991
e-mail: mail@kathrein.com