


Runtime: SMX1000C

APC Smart-UPS X, Line Interactive, 1000VA, Rack/tower 2U, 120V, 8x NEMA 5-15R, SmartConnect port, Extended runtime, Rail kit excluded

Smart-UPS

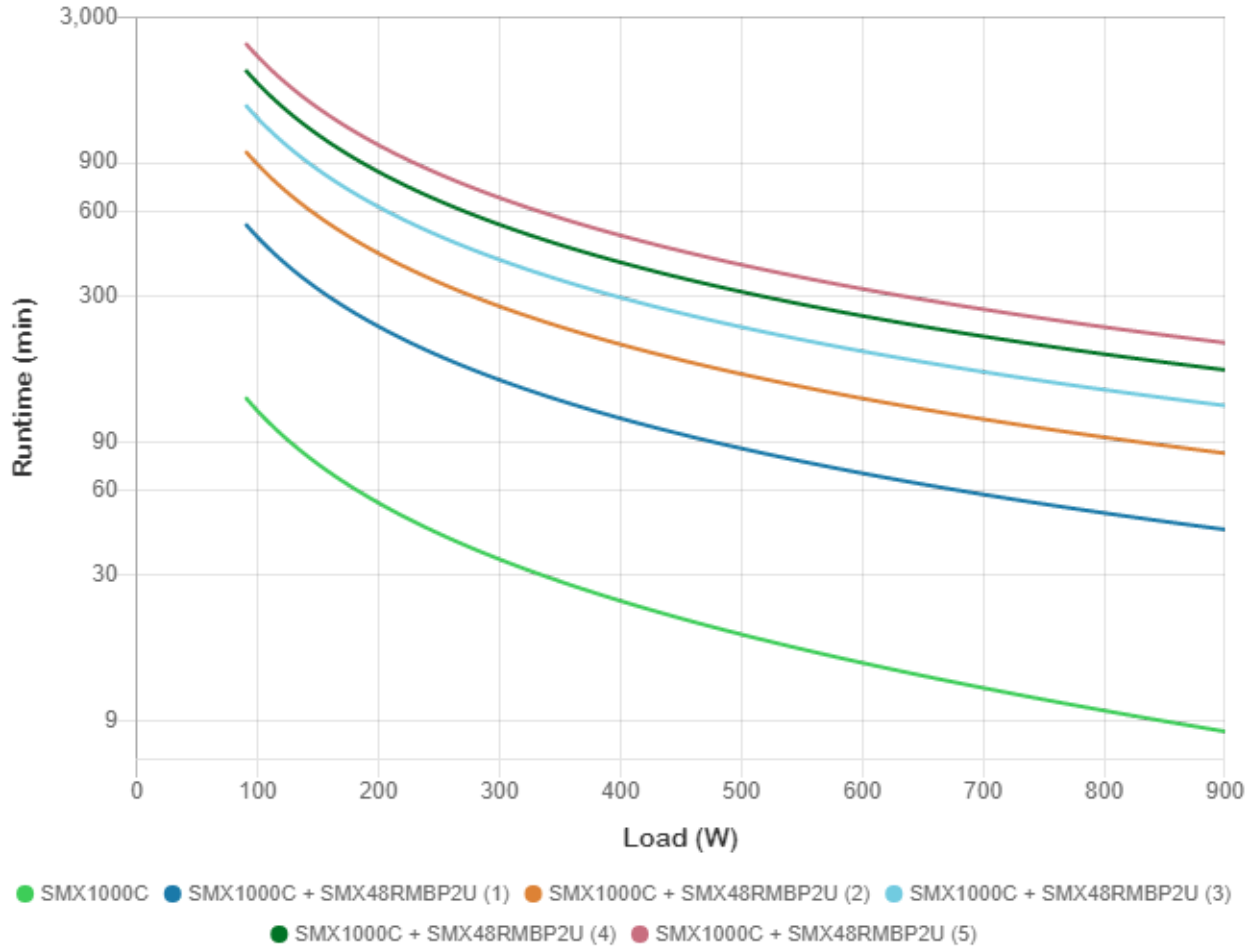

Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

Load / Runtime	90 W	100 W	200 W	300 W	400 W	500 W	600 W	700 W	800 W	900 W
SMX1000C	2 h 9 min	1 h 56 min	54 min	34 min	24 min 15 sec	18 min 24 sec	14 min 32 sec	11 min 49 sec	9 min 48 sec	8 min 15 sec
1x SMX1000C	9 h 3 min	8 h 6 min	3 h 53 min	2 h 30 min	1 h 49 min	1 h 25 min	1 h 9 min	58 min	50 min	43 min
1x SMX48RMBP2U										
1x SMX1000C	16 h 30 min	14 h 47 min	7 h 6 min	4 h 35 min	3 h 21 min	2 h 37 min	2 h 8 min	1 h 48 min	1 h 33 min	1 h 21 min
2x SMX48RMBP2U										
1x SMX1000C	24 h 10 min	21 h 40 min	10 h 25 min	6 h 44 min	4 h 56 min	3 h 52 min	3 h 10 min	2 h 40 min	2 h 18 min	2 h 1 min
3x SMX48RMBP2U										
1x SMX1000C	32 h 15 min	28 h 55 min	13 h 55 min	9 h	6 h 36 min	5 h 10 min	4 h 14 min	3 h 34 min	3 h 5 min	2 h 43 min
4x SMX48RMBP2U										
1x SMX1000C	40 h 13 min	36 h 3 min	17 h 21 min	11 h 14 min	8 h 14 min	6 h 28 min	5 h 18 min	4 h 28 min	3 h 52 min	3 h 23 min
5x SMX48RMBP2U										

<https://www.apc.com/us/en/products-runtime-graph/SMX1000C/APC-Smart-UPS-X-Line-Interactive-1000VA-Rack-tower-2U-120V-8x-NEMA-5-15R-SmartConnect-port-Extended-runtime-Rail-kit-excluded>