


Runtime: SMX1500RM2UC

APC Smart-UPS X, Line Interactive, 1500VA, Rack/tower 2U, 120V, 8x NEMA 5-15R, SmartConnect port, Extended runtime, Rail kit included

Smart-UPS

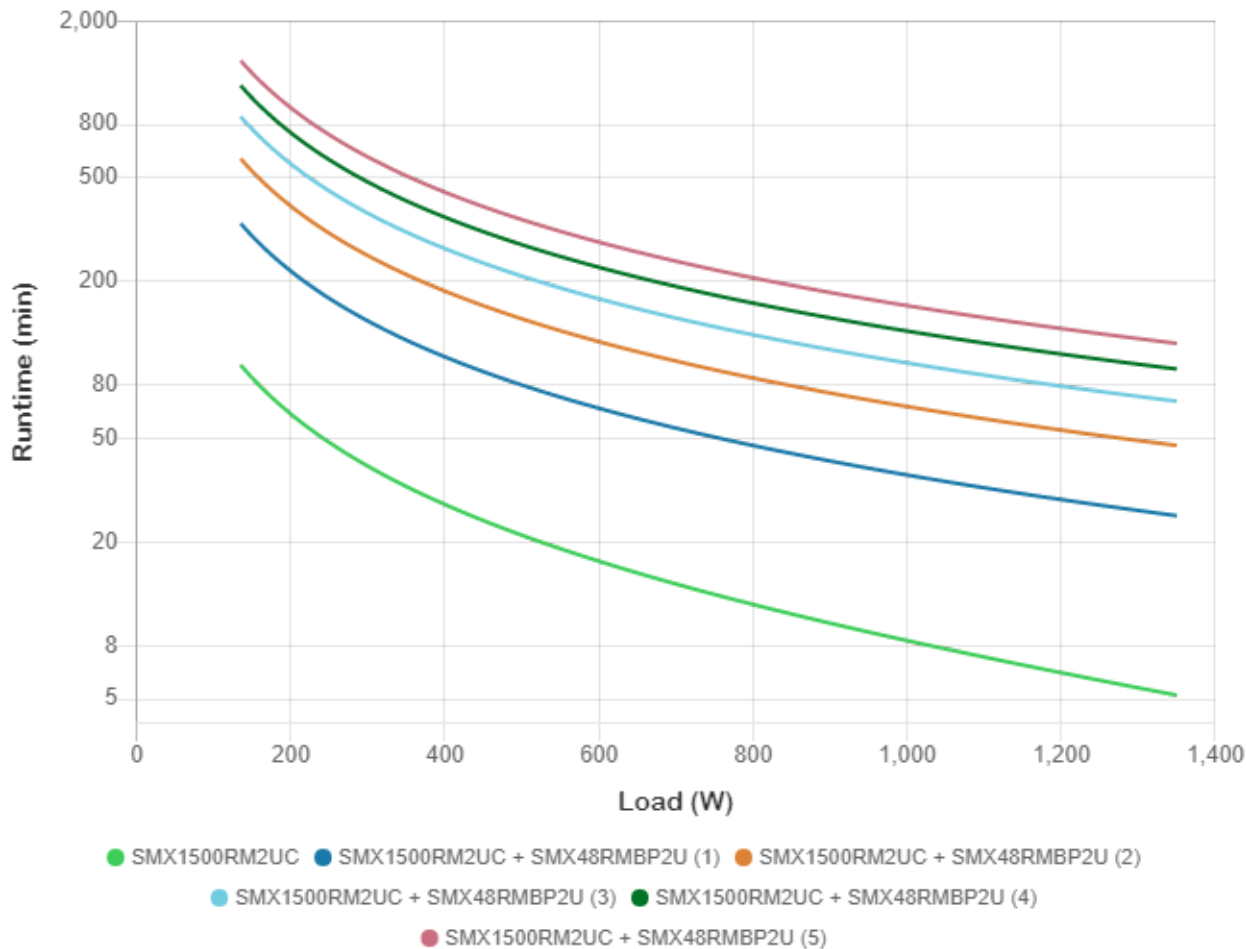

Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

Load / Runtime	135 W	200 W	300 W	400 W	500 W	600 W	700 W	800 W	900 W	1,000 W	1,100 W	1,200 W	1,300 W	1,350 W
SMX1500RM2UC	1 h 35 min	1 h 2 min	39 min	27 min 52 sec	21 min 14 sec	16 min 53 sec	13 min 48 sec	11 min 31 sec	9 min 46 sec	8 min 22 sec	7 min 14 sec	6 min 18 sec	5 min 31 sec	5 min 10 sec
1x SMX1500RM2UC	5 h 33 min	3 h 39 min	2 h 21 min	1 h 42 min	1 h 20 min	1 h 5 min	54 min	46 min	40 min	36 min	32 min	29 min 6 sec	26 min 25 sec	25 min 14 sec
1x SMX48RMBP2U														
1x SMX1500RM2UC	9 h 51 min	6 h 29 min	4 h 11 min	3 h 3 min	2 h 23 min	1 h 57 min	1 h 38 min	1 h 25 min	1 h 14 min	1 h 6 min	59 min	53 min	49 min	46 min
2x SMX48RMBP2U														
1x SMX1500RM2UC	14 h 18 min	9 h 25 min	6 h 5 min	4 h 27 min	3 h 29 min	2 h 51 min	2 h 24 min	2 h 4 min	1 h 49 min	1 h 37 min	1 h 27 min	1 h 19 min	1 h 12 min	1 h 9 min
3x SMX48RMBP2U														
1x SMX1500RM2UC	18 h 49 min	12 h 24 min	8 h 1 min	5 h 52 min	4 h 36 min	3 h 46 min	3 h 11 min	2 h 45 min	2 h 24 min	2 h 8 min	1 h 56 min	1 h 45 min	1 h 36 min	1 h 32 min
4x SMX48RMBP2U														
1x SMX1500RM2UC	23 h 27 min	15 h 27 min	10 h	7 h 20 min	5 h 45 min	4 h 43 min	3 h 59 min	3 h 26 min	3 h 1 min	2 h 41 min	2 h 25 min	2 h 11 min	2 h	1 h 55 min
5x SMX48RMBP2U														

<https://www.apc.com/us/en/products-runtime-graph/SMX1500RM2UC/APC-Smart-UPS-X-Line-Interactive-1500VA-Rack-tower-2U-120V-8x-NEMA-5-15R-SmartConnect-port-Extended-runtime-Rail-kit-included>